

HORIZONTAL END SUCTION VOLUTE PROCESS PUMP MODEL GSO

ISO2858/5199

TECHNICAL DATA BOOK 50/60Hz



eDYNAMiQ

Eco, Dynamic and Integrated Quality

EBARA CORPORATION

July.2021

SPECIFICATION

Main Applications	A-1
Product Features	A-2
General Description and Designation	A-3
Design Details	A-4

TECHNICAL DATA

Impeller Diameter	B-1
Shaft No. and Shaft Diameter	B-2
Maximum Allowable Pressure	B-3
Interchangeability Chart	B-4, 5
The Number of Recommended Spare Parts	B-6
Noise Data	B-7
Lubricants Data	B-8

DIMENSIONS

Dimensions of Bare Shaft Pump	C-1,2 - rev.2
Dimensions of Pump with motor (Figure)	C-3
Dimensions of Pump with motor (2P)	C-4, 5, 6 - rev.1
Dimensions of Pump with motor (4P)	C-7, 8, 9,10 - rev.1

CONSTRUCTION

Sectional View(Mechanical Seal Type with Grease Lubrication Bearings)	D-1
Sectional View(Gland Packing Type with Grease Lubrication Bearings)	D-2
Sectional View(Mechanical Seal Type with Oil Lubrication Bearings)	D-3
Sectional View(Optional Mechanical Seal)	D-3A - rev.2
Sectional View(Optional-Heavy Duty Bearing)	D-3F - new
Materials of Constructions	D-4, 5
Selection of Shaft Seal	D-6 - rev.2

SELECTION CHART

50Hz – 2950 min-1	E-1
50Hz – 1450 min-1	E-2
60Hz – 3550 min-1	E-3
60Hz – 1750 min-1	E-4

PERFORMANCE CURVES**50Hz – 2950 min-1**

GSO50-32-125, GSO50-32-160, GSO50-32-200, GSO50-32-250
GSO65-40-125, GSO65-40-160, GSO65-40-200, GSO65-40-250
GSO80-50-125, GSO80-50-160, GSO80-50-200, GSO80-50-250, GSO80-50-315
GSO100-65-160, GSO100-65-200, GSO100-65-250, GSO100-65-315
GSO125-80-160, GSO125-80-200, GSO125-80-250, GSO125-80-315
GSO125-100-200

50Hz – 1450 min-1

GSO50-32-125, GSO50-32-160, GSO50-32-200, GSO50-32-250
GSO65-40-125, GSO65-40-160, GSO65-40-200, GSO65-40-250
GSO80-50-125, GSO80-50-160, GSO80-50-200, GSO80-50-250, GSO80-50-315
GSO100-65-160, GSO100-65-200, GSO100-65-250, GSO100-65-315
GSO125-80-160, GSO125-80-200, GSO125-80-250, GSO125-80-315, GSO125-80-400
GSO125-100-200, GSO125-100-250, GSO125-100-315, GSO125-100-400
GSO150-125-200, GSO150-125-250, GSO150-125-315, GSO150-125-400, GSO150-125-500
GSO200-150-250, GSO200-150-315, GSO200-150-400, GSO200-150-500
GSO250-200-400, GSO250-200-500

60Hz – 3550 min-1

GSO50-32-125, GSO50-32-160, GSO50-32-200, GSO50-32-250
GSO65-40-125, GSO65-40-160, GSO65-40-200, GSO65-40-250
GSO80-50-125, GSO80-50-160, GSO80-50-200, GSO80-50-250
GSO100-65-160, GSO100-65-200, GSO100-65-250
GSO125-80-160, GSO125-80-200, GSO125-80-250

60Hz – 1750 min-1

GSO50-32-125, GSO50-32-160, GSO50-32-200, GSO50-32-250
GSO65-40-125, GSO65-40-160, GSO65-40-200, GSO65-40-250
GSO80-50-125, GSO80-50-160, GSO80-50-200, GSO80-50-250, GSO80-50-315
GSO100-65-160, GSO100-65-200, GSO100-65-250, GSO100-65-315
GSO125-80-160, GSO125-80-200, GSO125-80-250, GSO125-80-315, GSO125-80-400
GSO125-100-200, GSO125-100-250, GSO125-100-315, GSO125-100-400
GSO150-125-200, GSO150-125-250, GSO150-125-315, GSO150-125-400, GSO150-125-500
GSO200-150-250, GSO200-150-315, GSO200-150-400, GSO200-150-500
GSO250-200-400, GSO250-200-500

FOOD INDUSTRY

- Low viscosity (up to 100cP)
- Middle viscosity (up to 400cst)
- Starch, Molasses, Wort
- Filtration pump
- Cleaning in place pump

PAPER AND PULP INDUSTRY

- **Material production process** (Around digester, Chemical recovery)
- **Preparation process** (Chemical Pump)
- **Paper making process** (Pulp pump 0.3% and below)

PETROCHEMICAL INDUSTRY

- Chemical process

INORGANIC CHEMICAL INDUSTRY

- Acid
- Alkali

SEMICONDUCTOR INDUSTRY

- **Ultrapure water production line** (Pure water pump)

MOTOR VEHICLE INDUSTRY

- **Machining line** (Coolant centralization)
- **Painting line** (Chemical conversion treatment, Electrodeposition paint)

STEEL INDUSTRY

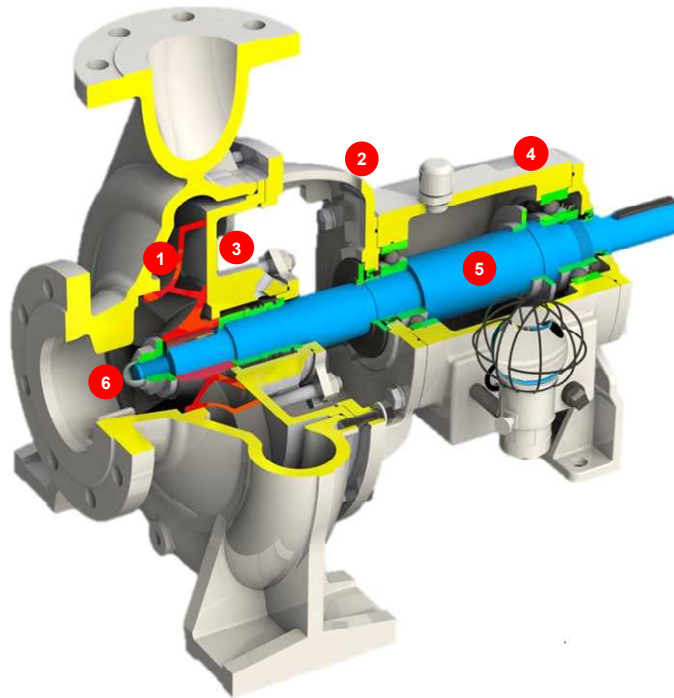
- **Rolling facility** (Scale pit pump)
- **Plating facility**

METAL GOODS INDUSTRY

- **Plating facility** (Degreasing washing, Rinse water drainage)

FISHERIES INDUSTRY

- **AQUACULTURE** (Seawater)

**1 Impeller with unique reverse open shape**

- Utilizing analysis technology, the following was achieved despite reverse open vanes with no balance holes ;
- Compatible for light slurry liquid with little entry of slurry at back side as well as clean liquid
 - Less axial thrust load
 - Low seal box pressure
 - High efficiency
 - Performance deterioration due to the gap between impeller and stationary side is smaller than front open type.

2 Back pullout construction

- Easy maintenance without disassembling suction and discharge piping

3 Gland cover compatible with various shaft seal types

- Sufficient seal box space enough to support shaft sealing requirements for special applications

4 Heavy duty design of bearing and bearing housing construction

- Low vibration value of 3.0 or 4.5 mm/s as per ISO 5199
- Longer bearing life as per ISO 5199
- Both grease (shield type) and oil lubrication available
- Standard deep groove ball bearings adopted by reducing the axial thrust load. This can reduce the cost of parts.

5 Heavy duty shaft design

- Deflection at shaft seal 50 μ m or less
- Reduction of shaft sealing problems to make maintenance costs lower by small shaft deflection and vibration

6 U-type impeller nut

- Not loosen during operation
- Short assembly time
- Can be used repeatedly

7 High interchangeability of parts

- Minimized maintenance cost and stock parts
- Only 4 sizes of bearing housing frame
- Only 7 type of shaft

8 Energy-saving Design

- World top class pump efficiency
- Due to higher efficiency, energy consumption lower and pump size smaller

9 International Standards

- Pump dimension in accordance with ISO 2858 and EN 22858
- Pump design as per ISO 5199
- Seal chamber dimension in accordance with ISO 3069

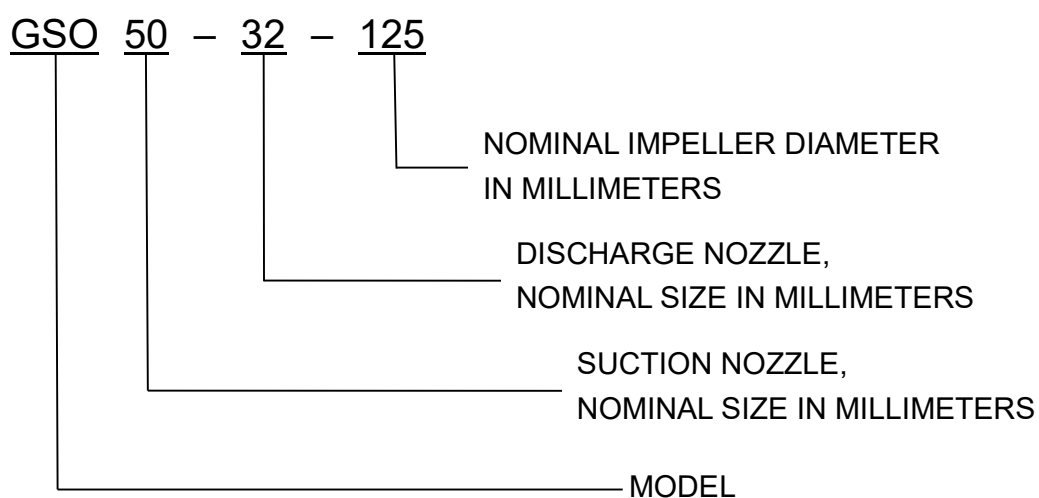
General Description

Capacities	To 1400 m ³ /hr (50Hz)
	To 1400 m ³ /hr (60Hz)
Heads	To 150 m (50Hz)
	To 140 m (60Hz)
Liquid temperatures	-30°C to 150°C
Max.working pressures	Up to 16Bar (1.6MPa)
Materials (*1)	Casing: 304 Stainless Steel Impeller: 304 Stainless Steel
Standards	ISO2858, ISO5199
Rotation	Clockwise viewed from coupling end

(*1) 316 stainless steel can be selected as an option.

Designation

The following designation is system according to ISO 2858.



FEATURES

- Horizontal foot mounting
- Back pull-out design
- Single-stage
- Radially split volute casing

APPLICABLE FLANGE STANDARD

- EN PN16
- JIS 10K

IMPELLER TYPE

- Reversed semi-open impeller with shuriken shroud (except some models), single suction type and without balancing holes to reduce continuous supply of slurry

SHAFT SEAL

- Gland packing
- Single mechanical seal based upon DIN 24960
- Single mechanical seal (Cylindrical type)
- Double mechanical seal (Cylindrical type)

BEARINGS AND LUBRICATION

- Standard : Shield ball bearing (Grease lubrication)
- Optional : Ball bearing (Oil lubrication)
- Optional : Heavy duty ball bearing (Oil lubrication)

PAINTING

1. Outer Surface**• Standard for Casing and Gland Cover**

Primer coating	Non painting
Final coating	Non painting

• Standard for Bearing Housing, Bearing Cover, Adapter, Bracket and Stay

Primer coating	Polyurethane resin primer
Final coating	Acrylic urethane resin paint
Finish color	Munsell 2.5PB4/2 (Dark gray)

2. Inner Surface**• Standard for Casing, Gland cover and Impeller**

Primer coating	Non painting
Final coating	Non painting

• Standard for Bearing Housing

Primer coating	Polyurethane resin primer
Final coating	Non painting

TECHNICAL DATA – Impeller Diameter

B-1

— Not applicable Model Unit : in mm

Model	Shaft No.	50Hz				60Hz			
		2P		4P		2P		4P	
		Max	Min	Max	Min	Max	Min	Max	Min
50-32-125	40	142	106	142	106	142	106	142	106
50-32-160	40	169	135	169	135	169	135	169	135
50-32-200	40	209	161	209	161	209	161	209	161
50-32-250	50A	250	198	250	198	250	198	250	198
65-40-125	40	142	105	142	105	142	105	142	105
65-40-160	40	177	134	177	134	177	134	177	134
65-40-200	40	205	161	205	161	205	161	205	161
65-40-250	50A	248	200	248	200	248	200	248	200
80-50-125	40	144	111	144	111	144	111	144	111
80-50-160	40	177	131	177	131	177	131	177	131
80-50-200	40	210	171	210	171	210	171	210	171
80-50-250	50A	258	191	258	191	221	191	258	191
80-50-315	50B	310	254	327	254	-	-	327	254
100-65-160	50A	177	135	177	135	177	135	177	135
100-65-200	50A	219	162	219	162	211	162	219	162
100-65-250	50B	260	208	260	208	260	208	260	208
100-65-315	60	291	243	305	243	-	-	305	243
125-80-160	50A	177	147/127	177	147/127	177	147/127	177	147/127
125-80-200	50B	222	170/159.8	222	170/159.8	222	170/159.8	222	170/159.8
125-80-250	50B	257	220	257	220	247	220	257	220
125-80-315	60	301	243	317	243	—	—	317	243
125-80-400	60	-	-	393	307	—	—	393	307
125-100-200	50B	220	171	220	171	—	—	220	171
125-100-250	60	-	-	266	210	—	—	266	210
125-100-315	60	-	-	303	261	—	—	303	261
125-100-400	60	-	-	392	312	—	—	392	312
150-125-200	60	-	-	224	174	—	—	224	174
150-125-250	60	-	-	274	213	—	—	274	213
150-125-315	60	-	-	334	259	—	—	334	259
150-125-400	60	-	-	416	329	—	—	416	329
150-125-500	75A	-	-	485	396	—	—	459	396
200-150-250	60	-	-	274	213	—	—	274	213
200-150-315	75A	-	-	352	273	—	—	352	273
200-150-400	75A	-	-	411	319	—	—	411	319
200-150-500	75B	-	-	485	396	—	—	485	404
250-200-400	75B	-	-	420	326	—	—	420	326
250-200-500	90	-	-	530	401	—	—	454	401

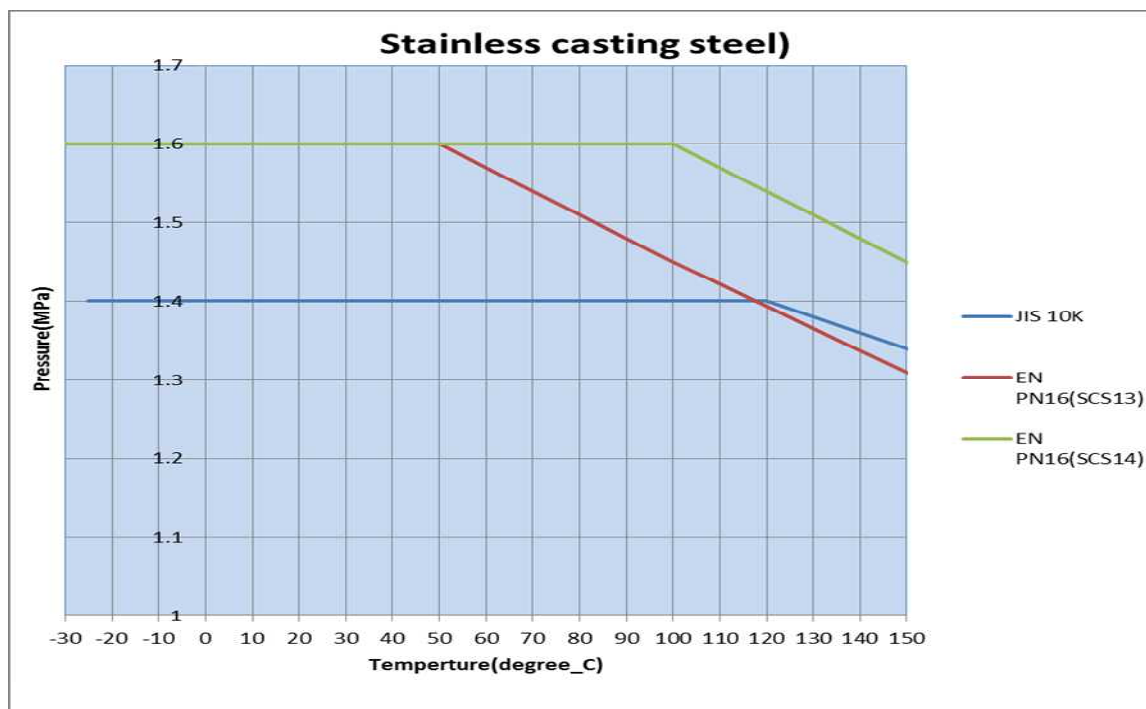
TECHNICAL DATA – Shaft No. and Shaft Diameter

B-2

Model	Shaft No.	At Coupling (mm)	At Radial Bearing (mm)	At Thrust Bearing (mm)	Under Shaft Sleeve (mm)	Sleeve Dia. (For Gland packing) (mm)
50-32-125	40	24	40	40	38	45
50-32-160	40	24	40	40	38	45
50-32-200	40	24	40	40	38	45
50-32-250	50A	32	50	55	48	55
65-40-125	40	24	40	40	38	45
65-40-160	40	24	40	40	38	45
65-40-200	40	24	40	40	38	45
65-40-250	50A	32	50	55	48	55
80-50-125	40	24	40	40	38	45
80-50-160	40	24	40	40	38	45
80-50-200	40	24	40	40	38	45
80-50-250	50A	32	50	55	48	55
80-50-315	50B	32	50	55	48	55
100-65-160	50A	32	50	55	48	55
100-65-200	50A	32	50	55	48	55
100-65-250	50B	32	50	55	48	55
100-65-315	60	42	60	65	55	60
125-80-160	50A	32	50	55	48	55
125-80-200	50B	32	50	55	48	55
125-80-250	50B	32	50	55	48	55
125-80-315	60	42	60	65	55	60
125-80-400	60	42	60	65	55	60
125-100-200	50B	32	50	55	48	55
125-100-250	60	42	60	65	55	60
125-100-315	60	42	60	65	55	60
125-100-400	60	42	60	65	55	60
150-125-200	60	42	60	65	55	60
150-125-250	60	42	60	65	55	60
150-125-315	60	42	60	65	55	60
150-125-400	60	42	60	65	55	60
150-125-500	75A	48	75	80	65	70
200-150-250	60	42	60	65	55	60
200-150-315	75A	48	75	80	65	70
200-150-400	75A	48	75	80	65	70
200-150-500	75B	65	75	80	75	80
250-200-400	75B	65	75	80	75	80
250-200-500	90	75	90	80	80	90

1. Maximum Allowable Working Pressure (MAWP)

Pressure casing material	Liquid temperature	Max. allowable working pressures	Flange standard
Stainless Steel	-30°C to 150°C	16 bar (1.6MPa)	EN PN16
		14bar (1.4MPa)	JIS 10K



2. Maximum Allowable Suction Pressure (MASP)

(1) Mechanical Seal Application

Maximum Allowable Suction Pressure (MASP) must be smaller than the difference between the Maximum Allowable Working Pressure (MAWP) and Pump Shut-off Pressure (PSP), as follows. However, MASP shall not exceed 16 bar.

$$\text{MASP} < \text{MAWP} - \text{PSP}$$

$$[\text{PSP (in bar)} = 0.098 \times \text{Pump Shut-off Head (in m)} \times \text{Liquid Density (in kg/}\ell\text{)}]$$

(2) Gland Packing Application

Maximum Allowable Suction Pressure (MASP) of Gland Packing application is **6 bar** as standard.

TECHNICAL DATA – Interchangeability Chart

B-4

Grease Shield Bearing										for Mechanical Seal				for Gland Packing		
Model	Shaft No.	Impeller	Ball Bearing (M)	Ball Bearing (P)	Deflector	V RING - BG COVER	O-Ring (Gland Cover)	Mech. Seal	O-Ring (Gland Plate)	Packing Sleeve	Gasket (PK Sleeve)	Gland Packing				
50-32-125	40	Depends on each model	A	B	A	A	A	A	A	A	A	A				
50-32-160	40		A	B	A	A	A	A	A	A	A	A				
50-32-200	40		A	B	A	A	B	A	A	A	A	A				
50-32-250	50A		C	D	B	B	C	B	B	B	B	B				
65-40-125	40		A	B	A	A	A	A	A	A	A	A				
65-40-160	40		A	B	A	A	A	A	A	A	A	A				
65-40-200	40		A	B	A	A	A	B	A	A	A	A				
65-40-250	50A		C	D	B	B	C	C	B	B	B	B				
80-50-125	40		A	B	A	A	A	A	A	A	A	A				
80-50-160	40		A	B	A	A	A	A	A	A	A	A				
80-50-200	40		A	B	A	A	A	B	A	A	A	A				
80-50-250	50A		C	D	B	B	C	C	B	B	B	B				
80-50-315	50B		C	D	B	B	D	B	B	B	C	B				
100-65-160	50A		C	D	B	B	A	B	B	B	B	B				
100-65-200	50A		C	D	B	B	B	B	B	B	B	B				
100-65-250	50B		C	D	B	B	C	C	B	B	C	B				
100-65-315	60		E	F	C	C	D	D	C	C	D	C				
125-80-160	50A		C	D	B	B	C	E	C	C	D	C				
125-80-200	50B		C	D	B	B	B	B	B	B	C	B				
125-80-250	50B		C	D	B	B	B	C	B	B	C	B				
125-80-315	60		E	F	C	C	C	D	C	C	D	C				
125-80-400	60		E	F	C	C	C	E	C	C	D	C				
125-100-200	50B		C	D	B	B	B	B	B	B	C	B				
125-100-250	60		E	F	C	C	C	C	C	C	D	C				
125-100-315	60		E	F	C	C	C	D	C	C	D	C				
125-100-400	60		E	F	C	C	C	E	C	C	D	C				
150-125-200	60		E	F	C	C	C	B	C	C	D	C				
150-125-250	60		E	F	C	C	C	C	C	C	D	C				
150-125-315	60		E	F	C	C	C	D	C	C	D	C				
150-125-400	60		E	F	C	C	C	E	C	C	D	C				
150-125-500	75A		G	H	D	D	D	F	D	D	E	D				
200-150-250	60		E	F	C	C	C	C	C	C	D	C				
200-150-315	75A		G	H	D	D	D	D	D	D	E	D				
200-150-400	75A		G	H	D	D	D	E	D	D	E	D				
200-150-500	75B		G	H	E	E	D	F	E	E	F	E				
250-200-400	75B		G	H	E	E	D	E	E	E	F	E				
250-200-500	90		G	J	F	F	E	F	F	F	G	F				

Note: Materials of every parts should be specified by the section of "Materials of Construction".
The same letters in the same vertical column are interchangeable.

Oil Lubrication Bearing										for Mechanical Seal				for Gland Packing		
Model	Shaft No.	Impeller	Ball Bearing (M)	Ball Bearing (P)	Deflector	Oil Seal (M)	Oil Seal (P)	O-Ring (Gland Cover)	O-Ring BG Cover (M)	O-Ring BG Cover (P)	Mech. Seal	O-Ring (Gland Plate)	Packing Sleeve	Gasket (PK Sleeve)	Gland Packing	
50-32-125	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
50-32-160	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
50-32-200	40		L	M	A	A	B	B	B	A	A	A	A	A	A	
50-32-250	50A		N	P	B	B	C	C	D	C	B	B	B	B	B	
65-40-125	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
65-40-160	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
65-40-200	40		L	M	A	A	B	B	B	A	A	A	A	A	A	
65-40-250	50A		N	P	B	B	C	C	D	C	B	B	B	B	B	
80-50-125	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
80-50-160	40		L	M	A	A	B	A	B	A	A	A	A	A	A	
80-50-200	40		L	M	A	A	B	B	B	A	A	A	A	A	A	
80-50-250	50A		N	P	B	B	C	C	D	C	B	B	B	B	B	
80-50-315	50B		N	P	B	B	C	A	D	C	B	B	B	B	B	
100-65-160	50A		N	P	B	B	C	B	D	C	B	B	B	B	B	
100-65-200	50A		N	P	B	B	C	C	D	C	B	B	B	B	B	
100-65-250	50B		N	P	B	B	C	C	D	C	B	B	B	B	B	
100-65-315	60		Q	R	C	C	D	A	F	E	C	C	D	C	C	
125-80-160	50A		N	P	B	B	C	B	D	C	B	B	B	B	B	
125-80-200	50B		N	P	B	B	C	B	D	C	B	B	B	B	B	
125-80-250	50B		N	P	B	B	C	C	D	C	B	B	B	B	B	
125-80-315	60		Q	R	C	C	D	D	F	E	C	C	D	C	C	
125-80-400	60		Q	R	C	C	D	E	F	E	C	C	D	C	C	
125-100-200	50B		N	P	B	B	C	B	D	C	B	B	B	B	B	
125-100-250	60		Q	R	C	C	D	C	F	E	C	C	D	C	C	
125-100-315	60		Q	R	C	C	D	D	F	E	C	C	D	C	C	
125-100-400	60		Q	R	C	C	D	E	F	E	C	C	D	C	C	
150-125-200	60		Q	R	C	C	D	B	F	E	C	C	D	C	C	
150-125-250	60		Q	R	C	C	D	C	F	E	C	C	D	C	C	
150-125-315	60		Q	R	C	C	D	D	F	E	C	C	D	C	C	
150-125-400	60		Q	R	C	C	D	E	F	E	C	C	D	C	C	
150-125-500	75A		Q	R	C	C	D	F	F	E	C	C	D	C	C	
200-150-250	60		Q	R	C	C	D	C	F	E	C	C	D	C	C	
200-150-315	75A		S	T	B	E	F	D	H	G	D	D	E	D	D	
200-150-400	75A		S	T	B	E	F	E	H	G	D	D	E	D	D	
200-150-500	75B		S	T	E	E	F	F	H	G	E	E	F	E	E	
250-200-400	75B		S	T	E	E	F	E	H	G	E	E	F	E	E	
250-200-500	90		S	U	F	G	H	F	H	G	F	F	G	F	F	

Note: Materials of every parts should be specified by the section of "Materials of Construction".
The same letters in the same vertical column are interchangeable.

TECHNICAL DATA – The Number of Recommended Spare Parts

B-6

The number of recommended spare parts

Parts name	Used number of parts / unit	Spare parts for 1 year operation		Spare parts for 2 years operation		Remarks
		1 pump	2 and more pumps (*1)	1 pump	2 and more pumps (*1)	
Impeller	1	-	-	1	20%	
Shaft	1	-	-	1	20%	
Ball bearing (M)	1	1	25%	1	40%	
Ball bearing (P)	1	1	25%	1	40%	
Packing sleeve	1	1	30%	1	50%	*2
Coupling consumable parts (if any)	1 set	1 set	30%	1	50%	
Mechanical seal	1 set	1 set	40%	1 sets	70%	*3
Deflector	1	1	40%	1	70%	
V Ring	1	1	40%	1	70%	*5
Oil Flinger	1	1	40%	1	70%	*4
Oil seal (M)	1	1	100%	2	150%	*4
Oil seal (P)	1	1	100%	2	150%	*4
Gland packing	1 set	1 set	100%	2 sets	150%	*2
Gasket-PK sleeve	1	1	100%	2	150%	*2
O-Rings	1	1	100%	2	150%	

*1 It should be noted, the standby pump is also taken into consideration, and the fraction of the calculation result is rounded up.

Calculation example: 3 pumps x 70%, applicable parts = 210% ⇒ Recommend 300% spare parts

*2 for gland packing type

*3 for mechanical seal type

*4 for oil lubrication bearing

*5 for grease shield bearing

Overall Sound Pressure Level

Unit : dB(A)

Model	Shaft No.	50Hz		60Hz	
		2950 min^{-1} (2 Pole)	1450 min^{-1} (4 Pole)	3550 min^{-1} (2 Pole)	1750 min^{-1} (4 Pole)
50-32-125	40	64	54	68	54
50-32-160	40	68	54	70	58
50-32-200	40	72	58	73	62
50-32-250	50A	73	62	77	65
65-40-125	40	66	54	70	54
65-40-160	40	70	58	73	62
65-40-200	40	73	62	77	65
65-40-250	50A	76	63	80	67
80-50-125	40	70	54	72	58
80-50-160	40	72	58	76	63
80-50-200	40	76	63	78	65
80-50-250	50A	80	67	81	69
80-50-315	50B	81	69	—	72
100-65-160	50A	73	62	77	65
100-65-200	50A	77	65	80	69
100-65-250	50B	81	67	81	71
100-65-315	60	84	71	—	72
125-80-160	50A	76	63	80	67
125-80-200	50B	81	67	84	71
125-80-250	50B	83	69	85	72
125-80-315	60	86	74	—	77
125-80-400	60	—	77	—	79
125-100-200	50B	81	69	—	72
125-100-250	60	—	72	—	74
125-100-315	60	—	74	—	77
125-100-400	60	—	77	—	80
150-125-200	60	—	71	—	73
150-125-250	60	—	73	—	77
150-125-315	60	—	77	—	79
150-125-400	60	—	79	—	82
150-125-500	75A	—	81	—	84
200-150-250	60	—	77	—	79
200-150-315	75A	—	79	—	81
200-150-400	75A	—	84	—	84
200-150-500	75B	—	84	—	86
250-200-400	75B	—	85	—	88
250-200-500	90	—	87	—	88

Note : The overall sound pressure level is the value measured 1m away from the pump unit and does not include driver noise.

TECHNICAL DATA – Lubricants Data

B-8

The following lubricants are used to lubricate pump bearings with an oil lubricated structure.

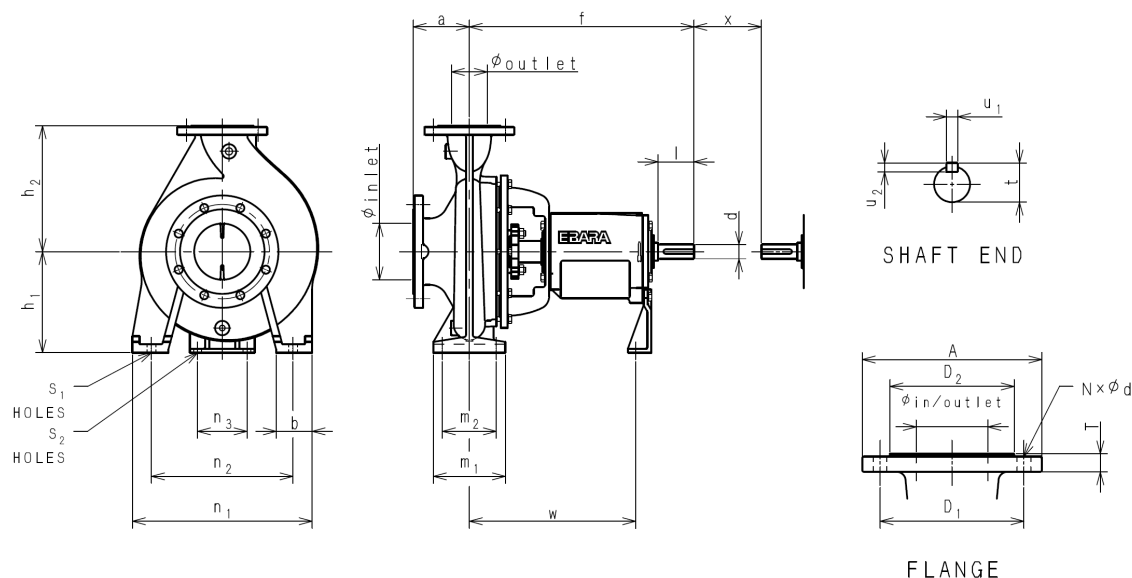
Recommended Lubricants Type	Manufacturer's Brand Name		
	SHELL	EXXON MOBIL	
Turbine Oil ISO VG46	TURBO OIL T46	DTE MEDIUM	TERESSO 46
Turbine Oil ISO VG68 (*1)	TURBO OIL T68	DTE HEAVY MEDIUM	TERESSO 68

Note : (*1) Recommended for the installation at tropical area.

Model	Shaft No.	Model	Shaft No.
50-32-125	40	125-80-250	50B
50-32-160	40	125-80-315	60
50-32-200	40	125-80-400	60
50-32-250	50A	125-100-200	50B
65-40-125	40	125-100-250	60
65-40-160	40	125-100-315	60
65-40-200	40	125-100-400	60
65-40-250	50A	150-125-200	60
80-50-125	40	150-125-250	60
80-50-160	40	150-125-315	60
80-50-200	40	150-125-400	60
80-50-250	50A	150-125-500	75A
80-50-315	50B	200-150-250	60
100-65-160	50A	200-150-315	75A
100-65-200	50A	200-150-400	75A
100-65-250	50B	200-150-500	75B
100-65-315	60	250-200-400	75B
125-80-160	50A	250-200-500	90
125-80-200	50B		

Bearing lubrication shall be changed at least per the following schedule.

Shaft No.	Initial Charge		On and after the Seacond Charge	
	Capacity (Liter)	Interval (Hours)	Capacity (Liter)	Interval (Hours)
40	0.6	300	0.6	4000
50A, 50B	1	300	1	4000
60	1.5	300	1.5	4000
75A, 75B	2	300	2	4000
90	2	300	2	4000

**Flange Dimension****Material : Stainless Steel****Flange Standard : EN PN16**

Unit : mm

Model (suc - dis)	Suction Flange							Discharge Flange						
	Φ_{in}	A	D1	D2	T	N	d	Φ_{out}	A	D1	D2	T	N	d
50-32	50	165	125	102	18	4	18	32	140	100	78	18	4	18
65-40	65	185	145	122	18	4	18	40	150	110	88	18	4	18
80-50	80	200	160	138	20	8	18	50	165	125	102	18	4	18
100-65	100	220	180	158	20	8	18	65	185	145	122	18	4	18
125-80	125	250	210	188	22	8	18	80	200	160	138	20	8	18
125-100	125	250	210	188	22	8	18	100	220	180	158	20	8	18
150-125	150	285	240	212	22	8	22	125	250	210	188	22	8	18
200-150	200	340	295	268	24	12	22	150	285	240	212	22	8	22
250-200	250	405	355	320	26	12	26	200	340	295	268	24	12	22

rev.1

Flange Standard : JIS 10K

Unit : mm

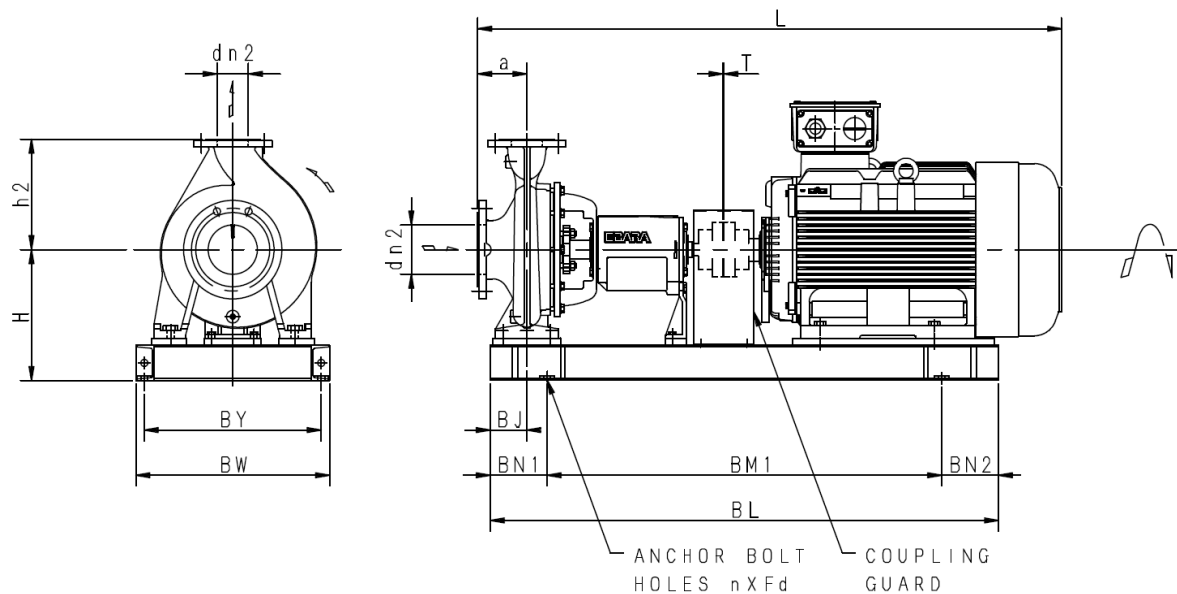
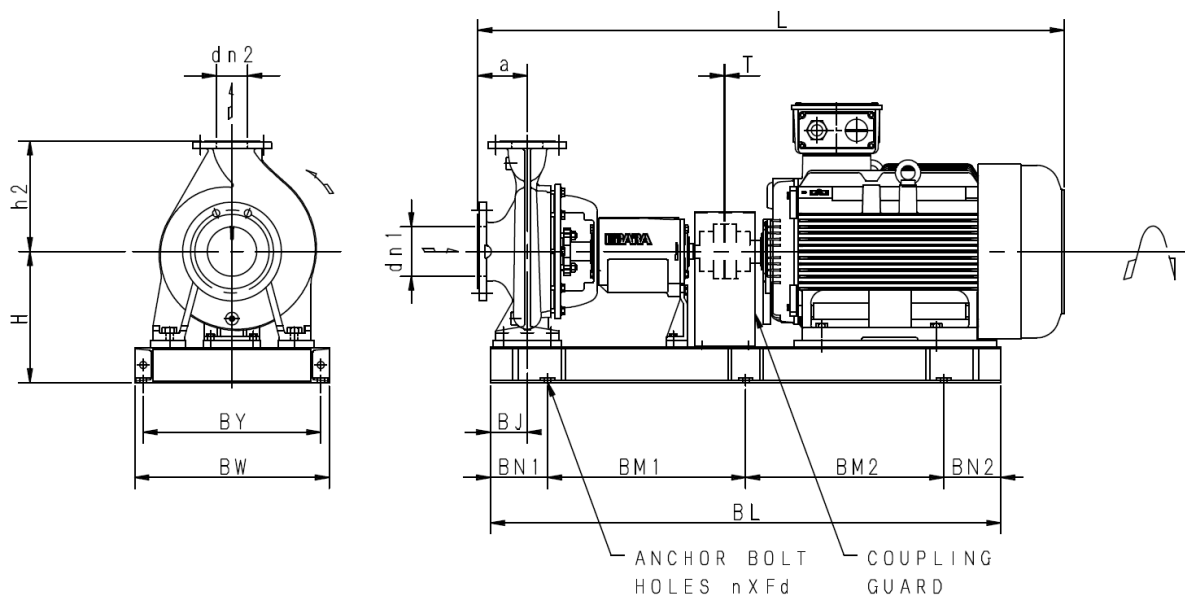
Model (suc - dis)	Suction Flange							Discharge Flange						
	Φ_{in}	A	D1	D2	T	N	d	Φ_{out}	A	D1	D2	T	N	d
50-32	50	155	120	96	16	4	19	32	135	100	76	16	4	19
65-40	65	175	140	116	18	4	19	40	140	105	81	16	4	19
80-50	80	185	150	126	18	8	19	50	155	120	96	16	4	19
100-65	100	210	175	151	18	8	19	65	175	140	116	18	4	19
125-80	125	250	210	182	20	8	23	80	185	150	126	18	8	19
125-100	125	250	210	182	20	8	23	100	210	175	151	18	8	19
150-125	150	280	240	212	22	8	23	125	250	210	182	20	8	23
200-150	200	330	290	262	22	12	23	150	280	240	212	22	8	23
250-200	250	400	355	324	24	12	25	200	330	290	262	22	12	23

Dimensions of Bare Shaft Pump

Unit : mm

Model	Shaft No.	Nominal Nozzle Diameter		Pump				Support							Holes for bolts		Shaft end						(*1)	Mass (kg)
		φ inlet	φ outlet	a	f	h1	h2	b	m1	m2	n1	n2	n3	w	S1	S2	d	l	t	u1	u2	x		
50-32-125	40	50	32	80	385	112	140	50	100	70	190	140	110	285	M12	M12	24	50	27	8	7	100	46	
50-32-160	40	50	32	80	385	132	160	50	100	70	240	190	110	285	M12	M12	24	50	27	8	7	100	46	
50-32-200	40	50	32	80	385	160	180	50	100	70	240	190	110	285	M12	M12	24	50	27	8	7	100	52	
50-32-250	50A	50	32	100	500	180	225	65	125	95	320	250	110	370	M12	M12	32	80	35	10	8	100	81	
65-40-125	40	65	40	80	385	112	140	50	100	70	210	160	110	285	M12	M12	24	50	27	8	7	100	47	
65-40-160	40	65	40	80	385	132	160	50	100	70	240	190	110	285	M12	M12	24	50	27	8	7	100	49	
65-40-200	40	65	40	100	385	160	180	50	100	70	265	212	110	285	M12	M12	24	50	27	8	7	100	55	
65-40-250	50A	65	40	100	500	180	225	65	125	95	320	250	110	370	M12	M12	32	80	35	10	8	100	84	
80-50-125	40	80	50	100	385	132	160	50	100	70	240	190	110	285	M12	M12	24	50	27	8	7	100	52	
80-50-160	40	80	50	100	385	160	180	50	100	70	265	212	110	285	M12	M12	24	50	27	8	7	100	52	
80-50-200	40	80	50	100	385	160	200	50	100	70	265	212	110	285	M12	M12	24	50	27	8	7	100	58	
80-50-250	50A	80	50	125	500	180	225	65	125	95	320	250	110	370	M12	M12	32	80	35	10	8	100	86	
80-50-315	50B	80	50	125	500	225	280	65	125	95	345	280	110	370	M12	M12	32	80	35	10	8	100	107	
100-65-160	50A	100	65	100	500	160	200	65	125	95	280	212	110	370	M12	M12	32	80	35	10	8	100	80	
100-65-200	50A	100	65	100	500	180	225	65	125	95	320	250	110	370	M12	M12	32	80	35	10	8	140	83	
100-65-250	50B	100	65	125	500	200	250	80	160	120	360	280	110	370	M16	M12	32	80	35	10	8	140	96	
100-65-315	60	100	65	125	530	225	280	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	137	
125-80-160	50A	125	80	125	500	180	225	65	125	95	320	250	110	370	M12	M12	32	80	35	10	8	140	85	
125-80-200	50B	125	80	125	500	180	250	65	125	95	345	280	110	370	M12	M12	32	80	35	10	8	140	92	
125-80-250	50B	125	80	125	500	225	280	80	160	120	400	315	110	370	M16	M12	32	80	35	10	8	140	104	
125-80-315	60	125	80	125	530	250	315	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	148	
125-80-400	60	125	80	125	530	280	355	80	160	120	435	355	110	370	M16	M12	42	110	45	12	8	140	199	
125-100-200	50B	125	100	125	500	200	280	80	160	120	360	280	110	370	M16	M12	32	80	35	10	8	140	114	
125-100-250	60	125	100	140	530	225	280	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	128	
125-100-315	60	125	100	140	530	250	315	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	148	
125-100-400	60	125	100	140	530	280	355	100	200	150	500	400	110	370	M20	M12	42	110	45	12	8	140	203	
150-125-200	60	150	125	140	530	250	315	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	141	
150-125-250	60	150	125	140	530	250	355	80	160	120	400	315	110	370	M16	M12	42	110	45	12	8	140	160	
150-125-315	60	150	125	140	530	280	355	100	200	150	500	400	110	370	M20	M12	42	110	45	12	8	140	187	
150-125-400	60	150	125	140	530	315	400	100	200	150	500	400	110	370	M20	M12	42	110	45	12	8	140	224	
150-125-500	75A	150	125	180	670	375	450	100	200	150	550	450	140	500	M20	M16	48	110	51.5	14	9	180	347	
200-150-250	60	200	150	160	530	280	375	100	200	150	500	400	110	370	M20	M12	42	110	45	12	8	180	193	
200-150-315	75A	200	150	160	670	315	400	100	200	150	550	450	140	500	M20	M16	48	110	51.5	14	9	180	264	
200-150-400	75A	200	150	160	670	315	450	100	200	150	550	450	140	500	M20	M16	48	110	51.5	14	9	180	336	
200-150-500	75B	200	150	180	700	375	560	100	200	150	550	450	140	530	M20	M16	65	110	69	18	11	180	456	
250-200-400	75B	250	200	180	700	385	560	100	315	250	660	560	140	530	M20	M16	65	110	69	18	11	180	445	
250-200-500	90	250	200	200	740	435	630	100	315	250	660	560	140	561	M24	M16	75	110	79.5	20	12	180	534	

(*1) Dimension to be considered by the manufacturer in respect of removal of inner parts of the Pump. The dimension X must not be identical with the distance between the shafts of the pump and the driving machine. The given dimension considers the use of flexible shaft couplings with spacer. The gap is necessary for the withdrawal of the rotor toward the driven side.

Fig.-A (for 4 anchor bolts without coupling spacer)**Fig.-B (for 6 anchor bolts without coupling spacer)**

DIMENSIONS - Dimensions of Pump with motor (2P)

C-4 rev.1

GSO - 2 Pole - 50Hz / 60Hz (1/3)

○ : Applicable

** : Dimension in mm

Model	Hz		Power kW	Fig.	Nozzle		Pump			Motor			BASE													Total (Approx.)		
	50	60			dn1 "	dn2 "	a "	h2 "	Mass (kg)	Frame	Mass (kg)	H "	BJ "	BN1 "	BM1 "	BM2 "	BN2 "	BL "	BY "	BW "	T "	n x Fd	Mass (kg)	L "	Mass (kg)			
50-32-125	○		0.75	A	50	32	80	140	46	80M1	12	190	70		130	540	-	130	800	320	350	3	4 x M12	47	762	105		
	○		1.1	A						80M2	13	190		130	540	-	130	800	320	350	3	47		762	106			
	○	○	1.5	A						90S	23	190		130	540	-	130	800	320	350	3	47		797	116			
	○	○	2.2	A						90L	26	190		130	540	-	130	800	320	350	3	48		819	120			
	○	○	3	A						100L	34	190		130	540	-	130	800	320	350	3	46		861	126			
	○	○	4	A						112M	40	190		130	540	-	130	800	350	380	3	44		876	130			
		○	5.5	A						132S1	57	230		150	600	-	150	900	350	380	3	61		913	164			
		○	7.5	A						132S2	64	230		150	600	-	150	900	350	380	3	61		913	171			
50-32-160	○		2.2	A	50	32	80	160	46	90L	25	210	70		130	540	-	130	800	350	380	3	4 x M12	44	819	115		
	○		3	A						100L	34	210		130	540	-	130	800	350	380	3	54		861	134			
	○	○	4	A						112M	40	210		130	540	-	130	800	350	380	3	50		876	136			
	○	○	5.5	A						132S1	57	210		150	600	-	150	900	350	380	3	61		913	164			
	○	○	7.5	A						132S2	64	230		150	600	-	150	900	350	380	3	55		913	165			
		○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3	74		1052	230			
50-32-200	○		4	A	50	32	80	180	52	112M	40	255	70		130	540	-	130	800	350	380	3	4 x M12	57	876	149		
	○		5.5	A						132S1	57	255		150	600	-	150	900	350	380	3	66		913	175			
	○	○	7.5	A						132S2	64	255		150	600	-	150	900	350	380	3	66		913	182			
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3	66		1052	228			
	○	○	15	A						160M2	118	255		170	660	-	170	1000	400	430	3	66		1052	236			
		○	18.5	A						160L	132	255		170	660	-	170	1000	400	430	3	76		1096	260			
		○	22	A						180M	162	275		190	740	-	190	1120	400	430	3	79		1114	293			
50-32-250	○		5.5	A	50	32	100	225	81	132S1	57	275	85		190	740	-	190	1120	440	470	3	4 x M12	68	1048	206		
	○		7.5	A						132S2	64	275		190	740	-	190	1120	440	470	3	68		1048	213			
	○		11	A						160M1	110	275		190	740	-	190	1120	440	470	3	85		1187	276			
	○	○	15	A						160M2	118	275		190	740	-	190	1120	440	470	3	85		1187	284			
	○	○	18.5	A						160L	132	300		205	840	-	205	1250	440	480	3	4 x M16	99	1231	312			
		○	22	A						180M	162	300		205	840	-	205	1250	440	480	3		92	1249	335			
		○	30	A						200L1	256	320		205	840	-	205	1250	440	480	4		109	1400	446			
		○	37	A						200L2	276	320		205	840	-	205	1250	440	480	4		109	1400	466			
65-40-125	○		1.1	A	65	40	80	140	47	80M2	13	190	70		130	540	-	130	800	320	350	3	4 x M12	47	762	107		
	○		1.5	A						90S	23	190		130	540	-	130	800	320	350	3	47		797	117			
	○	○	2.2	A						90L	26	190		130	540	-	130	800	320	350	3	48		819	121			
	○	○	3	A						100L	34	190		130	540	-	130	800	320	350	3	46		861	127			
	○	○	4	A						112M	40	190		130	540	-	130	800	350	380	3	44		876	131			
	○	○	5.5	A						132S1	57	230		150	600	-	150	900	400	430	3	64		913	168			
		○	7.5	A						132S2	64	230		150	600	-	150	900	400	430	3	64		913	175			
		○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3	74		1052	231			
65-40-160	○		2.2	A	65	40	80	160	49	90L	26	210	70		130	540	-	130	800	350	380	3	4 x M12	44	819	119		
	○		3	A						100L	34	210		130	540	-	130	800	350	380	3	54		861	137			
	○	○	4	A						112M	40	210		130	540	-	130	800	350	380	3	50		876	139			
	○	○	5.5	A						132S1	57	210		150	600	-	150	900	350	380	3	50		913	156			
	○	○	7.5	A						132S2	64	210		150	600	-	150	900	350	380	3	50		913	163			
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3	74		1052	233			
		○	15	A						160M2	118	255		170	660	-	170	1000	400	430	3	74		1052	241			
		○	18.5	A						160L	132	255		170	660	-	170	1000	400	430	3	84		1096	265			
65-40-200	○		5.5	A	65	40	100	180	55	132S1	57	240	70		150	600	-	150	900	350	380	3	4 x M12	62	933	174		
	○		7.5	A						132S2	64	240		150	600	-	150	900	350	380	3	62		933	181			
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3	66		1072	231			
	○	○	15	A						160M2	118	255		170	660	-	170	1000	400	430	3	66		1072	239			
		○	18.5	A						160L	132	255		170	660	-	170	1000	400	430	3	76		1134	293			
		○	22	A						180M	162	275		190	660	-	170	1000	400	430	3	76		1134	293			
		○	30	A						200L1	256	300		190	740	-	190	1120	440	470	4	97		1285	408			
		○	37	A						200L2	279	300		190	740	-	190	1120	440	470	4	97		1285	431			

EBARA End Suction Volute Pump

Model GSO

DIMENSIONS - Dimensions of Pump with motor (2P)

C-5 rev.1

GSO - 2 Pole - 50Hz / 60Hz (2/3)

○ : Applicable

** : Dimension in mm

Model	Hz		Power	Fig.	Nozzle		Pump		Motor			BASE													Total (Approx.)		
	50	60	kW		dn1 "	dn2 "	a "	h2 "	Mass (kg)	Frame	Mass (kg)	H "	BJ "	BN1 "	BM1 "	BM2 "	BN2 "	BL "	BY "	BW "	T "	n x Fd	Mass (kg)	L "	Mass (kg)		
65-40-250	○		7.5	A	65	40	100	225	84	132S2	57	275	85	170	660	-	170	1000	400	430	3	4 x M12	63	1048	204		
	○		11	A						160M1	110	275		190	740	-	190	1120	440	470	3		85	1187	279		
	○		15	A						160M2	118	275		190	740	-	190	1120	440	470	3		85	1187	287		
	○	○	18.5	A						160L	132	275		190	740	-	190	1120	440	470	3		85	1231	301		
	○	○	22	A						180M	162	275		190	740	-	190	1120	440	470	3	77	1249	323			
	○	○	30	A						200L1	256	320		205	840	-	205	1250	490	530	4	4 x M16	113	1400	453		
	○	○	37	A						200L2	279	320		205	840	-	205	1250	490	530	4		113	1400	476		
	○		45	A						225M	314	345		205	840	-	205	1250	490	530	4		114	1445	512		
	○		55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	138	1532	657		
80-50-125	○		2.2	A	80	50	100	160	52	90L	26	210	70	130	540	-	130	800	350	380	3	4 x M12	44	839	122		
	○		3	A						100L	34	210		130	540	-	130	800	350	380	3		54	881	140		
	○	○	4	A						112M	40	210		130	540	-	130	800	350	380	3		50	896	142		
	○	○	5.5	A						132S1	57	230		150	600	-	150	900	350	380	3		55	933	164		
	○	○	7.5	A						132S2	64	230		150	600	-	150	900	350	380	3		55	933	171		
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3		74	1072	236		
	○		15	A						160M2	118	255		170	660	-	170	1000	400	430	3		74	1072	244		
	○																										
80-50-160	○		4	A	80	50	100	180	52	112M	40	240	70	130	540	-	130	800	350	380	3	4 x M12	47	896	139		
	○	○	5.5	A						132S1	57	255		150	600	-	150	900	350	380	3		66	933	175		
	○	○	7.5	A						132S2	64	255		150	600	-	150	900	350	380	3		66	933	182		
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3		66	1072	228		
	○	○	15	A						160M2	118	255		170	660	-	170	1000	400	430	3		66	1072	236		
	○		18.5	A						160L	132	255		170	660	-	170	1000	400	430	3		76	1116	260		
	○		22	A						180M	162	275		170	660	-	170	1000	400	430	3		76	1134	290		
	○		30	A						200L1	256	300		190	740	-	190	1120	440	470	4	97	1285	405			
80-50-200	○		7.5	A	80	50	100	200	58	132S2	64	255	70	150	600	-	150	900	350	380	3	4 x M12	66	933	188		
	○	○	11	A						160M1	110	255		170	660	-	170	1000	400	430	3		66	1072	234		
	○	○	15	A						160M2	118	255		170	660	-	170	1000	400	430	3		66	1072	242		
	○	○	18.5	A						160L	132	255		170	660	-	170	1000	400	430	3		76	1116	266		
	○	○	22	A						180M	162	275		170	660	-	170	1000	440	470	3		79	1134	299		
	○	○	30	A						200L1	256	300		190	740	-	190	1120	440	470	4		97	1285	411		
	○	○	37	A						200L2	279	300		190	740	-	190	1120	440	470	4		97	1285	434		
	○		45	A						225M	314	345		190	740	-	190	1120	490	530	4	4 x M16	113	1330	485		
80-50-250	○		11	A	80	50	125	225	86	160M1	110	275	85	190	740	-	190	1120	440	470	3	4 x M12	85	1212	281		
	○		15	A						160M2	118	275		190	740	-	190	1120	440	470	3		85	1212	289		
	○		18.5	A						160L	132	275		190	740	-	190	1120	440	470	3		85	1256	303		
	○		22	A						180M	162	275		190	740	-	190	1120	440	470	3		77	1274	325		
	○	○	30	A						200L1	256	320		205	840	-	205	1250	490	530	4	4 x M16	113	1425	455		
	○	○	37	A						200L2	279	320		205	840	-	205	1250	490	530	4		113	1425	478		
	○	○	45	A						225M	314	345		205	840	-	205	1250	490	530	4		114	1470	514		
	○	○	55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	138	1558	659		
	○		75	B						280S	571	420		230	470	470	230	1400	600	640	4	6 x M20	178	1636	835		
80-50-315	○		30	A	80	50	125	280	107	200L1	296	345	85	205	840	-	205	1250	490	530	4	4 x M16	127	1425	490		
	○		37	A						200L2	279	345		205	840	-	205	1250	490	530	4		127	1425	513		
	○		45	A						225M	314	345		205	840	-	205	1250	490	530	4		107	1470	528		
	○		55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	126	1558	668		
	○		75	B						280S	571	420		230	470	470	230	1400	600	640	4	6 x M20	149	1636	827		
100-65-160	○		5.5	A	100	65	100	200	80	132S1	57	255	85	170	660	-	170	1000	400	430	3	4 x M12	73	1048	210		
	○		7.5	A						132S2	64	255		170	660	-	170	1000	400	430	3		73	1048	217		
	○	○	11	A						160M1	110	255		190	740	-	190	1120	400	430	3		72	1187	262		
	○	○	15	A						160M2	118	255		190	740	-	190	1120	400	430	3		72	1187	270		
	○	○	18.5	A						160L	132	255		190	740	-	190	1120	400	430	3		80	1231	292		
	○		22	A						180M	162	275		190	740	-	190	1120	440	470	3		83	1249	325		
	○		30	A						200L1	256	320		205	840	-	205	1250	440	480	4		4 x M16	115	1400	451	
	○	○	37	A						200L2	279	320		205	840	-	205	1250	440	480	4	115		1400	474		

DIMENSIONS - Dimensions of Pump with motor (2P)

C-6 rev.1

GSO - 2 Pole - 50Hz / 60Hz (3/3)

O : Applicable

** : Dimension in mm

Model	Hz		Power kW	Fig.	Nozzle		Pump			Motor		BASE														Total (Approx.)						
	50	60			dn1 **	dn2 **	a **	h2 **	Mass (kg)	Frame	Mass (kg)	H **	BJ **	BN1 **	BM1 **	BM2 **	BN2 **	BL **	BY **	BW **	T **	n x Fd	Mass (kg)	L **	Mass (kg)							
100-65-200	○		7.5	A	100	65	100	225	83	132S2	64	275	85	170	660	-	170	1000	400	430	3	4 x M12	63	1048	210							
	○		11	A						160M1	110	275		190	740	-	190	1120	400	430	3		82	1187	275							
	○		15	A						160M2	118	275		190	740	-	190	1120	400	430	3		82	1187	283							
	○	○	18.5	A						160L	132	275		190	740	-	190	1120	400	430	3		82	1231	297							
	○	○	22	A						180M	162	275		190	740	-	190	1120	400	430	3	75	1249	320								
	○	○	30	A						200L1	256	320		205	840	-	205	1250	490	530	4	113	1400	452								
	○	○	37	A						200L2	279	320		205	840	-	205	1250	490	530	4	113	1400	475								
	○	○	45	A						225M	314	345		205	840	-	205	1250	490	530	4	114	1446	511								
		○	55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	136	1533	654							
100-65-250	○		18.5	A	100	65	125	250	96	160L	132	320	100	205	840	-	205	1250	490	530	3	4 x M16	108	1256	336							
	○	○	22	A						180M	162	320		205	840	-	205	1250	490	530	3		109	1274	367							
	○	○	30	A						200L1	256	320		205	840	-	205	1250	490	530	4		109	1425	461							
	○	○	37	A						200L2	279	320		205	840	-	205	1250	490	530	4		109	1425	484							
	○	○	45	A						225M	314	345		205	840	-	205	1250	490	530	4	120	1470	530								
	○	○	55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	137	1558	668							
	○	○	75	B						280S	571	420		230	470	470	230	1400	600	640	4	6 x M20	167	1636	834							
	100-65-315	○		30						B	100	65		125	280	137	200L1	256	345	100	230	470	470	230	1400	550	590	4	6 x M16	139	1455	532
		○		37						B							200L2	279	345		230	470	470	230	1400	550	590	4		139	1455	555
○			45	B	225M	314	345	230	470	470			230				1400	550	590		4	119	1500	570								
○			55	B	250M	435	370	230	470	470			230				1400	550	590		4	131	1588	703								
○			75	B	280S	571	420	270	530	530			270				1600	600	640		4	6 x M20	145	1666	853							
○			90	B	280M	657	420	270	530	530			270				1600	600	640		4		189	1714	983							
○			110	B	315S	1165	460	270	530	530			270				1600	670	710		4		212	1791	1514							
125-80-160		○		11	A	125	80	125	225	85			160M1				110	275	85		190	740	-	190	1120	400	430	3	4 x M12	82	1212	277
		○		15	A								160M2				118	275			190	740	-	190	1120	400	430	3		82	1212	285
	○	○	18.5	A	160L						132	275	190	740	-	190	1120	400		430	3	82	1256	299								
	○	○	22	A	180M						162	275	190	740	-	190	1120	400		430	3	75	1274	322								
	○	○	30	A	200L1						256	320	205	840	-	205	1250	440		480	4	109	1425	450								
	○	○	37	A	200L2						279	320	205	840	-	205	1250	440		480	4	4 x M16	109	1425	473							
		○	45	A	225M						314	345	205	840	-	205	1250	490		530	4	114	1470	513								
		○	55	B	250M						435	370	230	470	470	230	1400	550		590	4	6 x M16	138	1558	658							
	125-80-200	○		15	A						125	80	125	250	92	160M2	118	275		85	190	740	-	190	1120	400	430	3	4 x M12	82	1212	292
○			18.5	A	160L	132	275	190	740	-						190	1120	400	430		3	82	1256	306								
○			22	A	180M1	132	275	190	740	-						190	1120	400	430		3	75	1274	299								
○		○	30	A	200L1	256	320	205	840	-						205	1250	440	480		4	4 x M16	109	1425	457							
○		○	37	A	200L2	279	320	205	840	-						205	1250	440	480		4		109	1425	480							
○		○	45	A	225M	314	345	205	840	-						205	1250	450	590		4		119	1470	525							
○		○	55	B	250M	435	370	230	470	470						230	1400	550	590		4	6 x M16	143	1558	670							
○		○	75	B	280S	571	420	230	470	470						230	1400	600	640		4	6 x M20	178	1636	841							
		○	90	B	280M	657	420	270	530	530						270	1600	600	640		4		189	1684	938							
	○	110	B	315S	1165	460	270	530	530	270	1600	670	710	4	218	1761	1475															
125-80-250	○		30	A	125	80	125	280	104	200L1	256	345	100	205	840	-	205	1250	440	480	4	4 x M16	126	1425	486							
	○		37	A						200L2	279	345		205	840	-	205	1250	440	480	4		126	1425	509							
	○		45	A						225M	314	345		205	840	-	205	1250	550	590	4		114	1470	532							
	○		55	B						250M	435	370		230	470	470	230	1400	550	590	4	6 x M16	131	1558	670							
	○	○	75	B						280S	571	420		230	470	470	230	1400	600	640	4		162	1636	837							
	○	○	90	B						280M	657	420		270	530	530	270	1600	600	640	4		6 x M20	181	1684	942						
		○	110	B						315S	1165	460		270	530	530	270	1600	670	710	4	213		1761	1482							
		○	132	B						315M	1230	460		270	530	530	270	1600	670	710	4	220		1861	1554							
	125-80-315	○		45						B	125	80		125	315	148	225M	314	370	100	230	470	470	230	1400	550	590	4	6 x M16	141	1500	603
○			55	B	250M	435	370	230	470	470			230				1400	550	590		4	120	1588	703								
○			75	B	280S	571	420	270	530	530			270				1600	600	640		4	179	1666	898								
○			90	B	280M	657	420	270	530	530			270				1600	600	640		4	6 x M20	181	1714	986							
○			110	B	315S	1165	460	270	530	530			270				1600	670	710		4		206	1791	1519							
○			132	B	315M	1230	460	300	600	600			300				1800	670	710		4		222	1891	1600							
○			160	B	315L1	1345	460	300	600	600			300				1800	670	710		4	222	1891	1715								
125-100-200		○		22	A	125	100	125	280	114			180M1				132	320	100		205	840	-	205	1250	440	480	3	4 x M16	106	1274	352
		○		30	A								200L1				256	320			205	840	-	205	1250	440	480	4		106	1425	476
	○		37	A	200L2						279	320	205	840	-	205	1250	440		480	4	106	1425	499								
	○		45	A	225M						314	345	205	840	-	205	1250	490		530	4	117	1470	545								
	○		55	B	250M						435	370	230	470	470	230	1400	550		590	4	6 x M16	129	1558	678							
	○		75	B	280S						571	420	230	470	470	230	1400	600		640	4	6 x M20	145	1636	830							

DIMENSIONS - Dimensions of Pump with motor (4P)

C-7 rev.1

GSO - 4 Pole - 50Hz / 60Hz (1/4)

○ : Applicable

** : Dimension in mm

Model	Hz		Power kW	Fig.	Nozzle		Pump			Motor		BASE													Total (Approx.)		
	50	60			dn1 "	dn2 "	a "	h2 "	Mass (kg)	Frame	Mass (kg)	H "	BJ "	BN1 "	BM1 "	BM2 "	BN2 "	BL "	BY "	BW "	T "	n x Fd	Mass (kg)	L "	Mass (kg)		
50-32-125	○	○	0.55	A	50	32	80	140	46	80M1	14	190	70	130	540	-	130	800	320	350	3	4 x M12	47	762	107		
	○	○	0.75	A						80M2	16	190		130	540	-	130	800	320	350	3		47	762	109		
	○	○	1.1	A						90S	23	190		130	540	-	130	800	320	350	3		47	797	116		
50-32-160	○	○	0.55	A	50	32	80	160	46	80M1	14	210	70	130	540	-	130	800	320	350	3	4 x M12	42	762	102		
	○	○	0.75	A						80M2	16	210		130	540	-	130	800	320	350	3		42	762	104		
	○	○	1.1	A						90S	23	210		130	540	-	130	800	320	350	3		42	797	111		
50-32-200	○	○	0.75	A	50	32	80	180	52	80M2	16	240	70	130	540	-	130	800	320	350	3	4 x M12	44	762	112		
	○	○	1.1	A						90S	23	240		130	540	-	130	800	320	350	3		44	797	119		
	○	○	1.5	A						90L	26	240		130	540	-	130	800	320	350	3		46	819	124		
	○	○	2.2	A						100L1	35	240		130	540	-	130	800	320	350	3		46	861	133		
	○	○	3	A						100L2	41	240		130	540	-	130	800	320	350	3		47	861	140		
	○	○	4	A						112M	50	240		130	540	-	130	800	320	350	3		47	876	149		
	○	○	5.5	A						132S	70	240		150	600	-	150	900	350	380	3		60	932	164		
50-32-250	○	○	1.1	A	50	32	100	225	81	90S	23	275	85	150	600	-	150	900	350	380	3	4 x M12	60	954	167		
	○	○	1.5	A						90L	26	275		150	600	-	150	900	350	380	3		60	954	167		
	○	○	2.2	A						100L1	35	275		170	660	-	170	1000	400	430	3		64	996	180		
	○	○	3	A						100L2	41	275		170	660	-	170	1000	400	430	3		64	996	186		
	○	○	4	A						112M	50	275		170	660	-	170	1000	400	430	3		62	1011	193		
	○	○	5.5	A						132S	70	275		170	660	-	170	1000	400	430	3		63	1048	214		
	○	○	7.5	A						160M	121	275		190	740	-	190	1120	440	470	3		75	1274	355		
65-40-125	○	○	0.55	A	65	40	80	140	47	80M1	14	190	70	130	540	-	130	800	320	350	3	4 x M12	47	762	108		
	○	○	0.75	A						80M2	16	190		130	540	-	130	800	320	350	3		47	762	110		
	○	○	1.1	A						90S	23	190		130	540	-	130	800	320	350	3		47	797	117		
65-40-160	○	○	0.75	A	65	40	80	160	49	80M2	16	210	70	130	540	-	130	800	320	350	3	4 x M12	42	762	107		
	○	○	1.1	A						90S	23	210		130	540	-	130	800	320	350	3		42	797	114		
	○	○	1.5	A						90L	26	210		130	540	-	130	800	320	350	3		42	819	117		
	○	○	2.2	A						100L1	35	210		130	540	-	130	800	320	350	3		51	861	135		
	○	○	3	A						100L2	41	210		130	540	-	130	800	320	350	3		52	861	142		
65-40-200	○	○	0.75	A	65	40	100	180	55	80M2	16	240	70	130	540	-	130	800	320	350	3	4 x M12	44	782	115		
	○	○	1.1	A						90S	23	240		130	540	-	130	800	320	350	3		44	817	122		
	○	○	1.5	A						90L	26	240		130	540	-	130	800	320	350	3		46	839	127		
	○	○	2.2	A						100L1	35	240		130	540	-	130	800	320	350	3		46	881	136		
	○	○	3	A						100L2	41	240		130	540	-	130	800	320	350	3		46	881	142		
	○	○	4	A						112M	50	240		130	540	-	130	800	320	350	3		47	896	152		
	○	○	5.5	A						132S	70	240		150	600	-	150	900	350	380	3		62	933	187		
65-40-250	○	○	1.1	A	65	40	100	225	84	90S	23	275	85	150	600	-	150	900	350	380	3	4 x M12	60	932	167		
	○	○	1.5	A						90L	26	275		150	600	-	150	900	350	380	3		60	954	170		
	○	○	2.2	A						100L1	35	275		170	660	-	170	1000	400	430	3		64	996	183		
	○	○	3	A						100L2	41	275		170	660	-	170	1000	400	430	3		64	996	189		
	○	○	4	A						112M	50	275		170	660	-	170	1000	400	430	3		64	1011	198		
	○	○	5.5	A						132S	70	275		170	660	-	170	1000	400	430	3		63	1048	217		
	○	○	7.5	A						132M	77	275		170	660	-	170	1000	400	430	3		64	1086	225		
80-50-125	○	○	0.55	A	80	50	100	160	52	80M1	14	210	70	130	540	-	130	800	320	350	3	4 x M12	42	782	108		
	○	○	0.75	A						80M2	16	210		130	540	-	130	800	320	350	3		42	782	110		
	○	○	1.1	A						90S	23	210		130	540	-	130	800	320	350	3		42	817	117		
	○	○	1.5	A						90L	26	210		130	540	-	130	800	320	350	3		42	839	120		
	○	○	2.2	A						100L1	35	210		130	540	-	130	800	320	350	3		51	881	138		
80-50-160	○	○	0.75	A	80	50	100	180	52	80M2	16	240	70	130	540	-	130	800	320	350	3	4 x M12	44	782	112		
	○	○	1.1	A						90S	23	240		130	540	-	130	800	320	350	3		44	817	119		
	○	○	1.5	A						90L	26	240		130	540	-	130	800	320	350	3		46	839	124		
	○	○	2.2	A						100L1	35	240		130	540	-	130	800	320	350	3		46	881	133		
	○	○	3	A						100L2	41	240		130	540	-	130	800	320	350	3		47	881	140		
80-50-200	○	○	4	A	80	50	100	200	58	112M	50	240	70	130	540	-	130	800	320	350	3	4 x M12	47	896	149		
	○	○	5.5	A						132S	70	240		150	600	-	150	900	350	380	3		62	933	190		
	○	○	1.1	A						90S	23	240		130	540	-	130	800	320	350	3		44	817	125		
	○	○	1.5	A						90L	26	240		130	540	-	130	800	320	350	3		46	839	130		
	○	○	2.2	A						100L1	35	240		130	540	-	130	800	320	350	3		46	881	139		
80-50-250	○	○	3	A	80	50	125	225	86	100L2	41	240	85	130	540	-	130	800	320	350	3	4 x M12	46	881	145		
	○	○	4	A						112M	50	240		130	540	-	130	800	320	350	3		49	896	157		
	○	○	5.5	A						132S	70	240		150	600	-	150	900	350	380	3		62	933	190		
	○	○	7.5	A						160M	121	240		190	740	-	190	1120	440	470	3		75	1274	355		
	○	○	11	A						160M	121	275		190	740	-	190	1120	440	470	3		75	1274	355		
	○	○	15	A						160M	121	320		190	740	-	190	1120	440	470	3		75	1274	355		
	○	○	18.5	A						180M	173	320		190	740	-	190	1120	440	470	3		75	1274	355		
100-65-160	○	○	0.75	A	100	65	100	200	80	80M2	16	255	85	150	600	-	150	900	350	380	3	4 x M12	58	897	154		
	○	○	1.1	A						90S	23	255		150	600	-	150	900	350	380	3		59	932	162		
	○	○	1.5	A						90L	26	255		150	600	-	150	900	350	380	3		59	954	165		
	○	○	2.2	A						100L1	35	255		170	660	-	170	1000	400	430	3		63	996	178		
	○	○	3	A						100L2	41	255		170	660	-	170	1000	400	430	3		63	996	184		
	○	○	4	A						112M	50	255		170	660	-	170	1000	400	430	3		61	1011	191		
	○	○	5.5	A						132S	70	255		170	660	-	170	1000	400	430	3		73	1048	222		

EBARA End Suction Volute Pump

Model GSO

DIMENSIONS - Dimensions of Pump with motor (4P)

C-8 rev.1

GSO - 4 Pole - 50Hz / 60Hz (2/4)

○ : Applicable

** : Dimension in mm

Model	Hz		Power kW	Fig.	Nozzle		Pump			Motor		BASE												Total (Approx.)		
	50	60			dn1 mm	dn2 mm	a mm	h2 mm	Mass (kg)	Frame	Mass (kg)	H mm	BJ mm	BN1 mm	BM1 mm	BM2 mm	BN2 mm	BL mm	BY mm	BW mm	T mm	n x Fd	Mass (kg)	L mm	Mass (kg)	
100-65-200	○		1.5	A	100	65	100	225	83	90L	26	275	85	150	600	-	150	900	350	380	3	4 × M12	60	954	169	
	○	○	2.2	A						100L1	35	275		170	660	-	170	1000	400	430	3		64	996	182	
	○	○	3	A						100L2	41	275		170	660	-	170	1000	400	430	3		64	996	188	
	○	○	4	A						112M	50	275		170	660	-	170	1000	400	430	3		64	1011	197	
	○	○	5.5	A						132S	70	275		170	660	-	170	1000	400	430	3		63	1048	216	
	○	○	7.5	A						132M	77	275		170	660	-	170	1000	400	430	3		64	1086	224	
	○	○	11	A						160M	121	275		190	740	-	190	1120	440	470	3		85	1187	289	
	○	○	15	A						160L	129	320		205	840	-	205	1250	440	480	3		103	1256	328	
100-65-250	○		2.2	A	100	65	125	250	96	100L1	35	295	100	170	660	-	170	1000	400	430	3	4 × M12	68	1021	199	
	○	○	3	A						100L2	41	295		170	660	-	170	1000	400	430	3		68	1021	205	
	○	○	4	A						112M	50	295		170	660	-	170	1000	400	430	3		68	1036	214	
	○	○	5.5	A						132S	70	295		170	660	-	170	1000	400	430	3		66	1073	232	
	○	○	7.5	A						132M	77	295		190	740	-	190	1120	440	430	3		71	1111	244	
	○	○	11	A						160M	121	295		190	740	-	190	1120	400	430	3		94	1212	311	
	○	○	15	A						160L	129	320		205	840	-	205	1250	440	480	3		103	1256	328	
	○	○	18.5	A						180M	173	345		205	840	-	205	1250	490	530	3		96	1304	406	
100-65-315	○	○	4	A	100	65	125	280	137	112M	50	320	100	170	660	-	170	1000	440	470	3	4 × M12	75	1066	262	
	○	○	5.5	A						132S	70	320		170	660	-	170	1000	440	470	3		74	1103	281	
	○	○	7.5	A						132M	77	320		190	740	-	190	1120	440	470	3		77	1141	291	
	○	○	11	A						160M	121	345		205	840	-	205	1250	490	530	3		97	1242	355	
	○	○	15	A						160L	129	345		205	840	-	205	1250	490	530	3	4 × M16	110	1286	376	
	○	○	18.5	A						180M	173	345		205	840	-	205	1250	490	530	3		96	1304	406	
	○	○	22	A						200L	270	370		230	470	470	230	1400	550	590	4		121	1455	539	
	○	○	30	B						225S	305	370		230	470	470	230	1400	550	590	4		138	1505	591	
125-80-160	○		1.5	A	125	80	125	225	85	90L	26	275	85	150	600	-	150	900	350	380	3	4 × M12	60	979	171	
	○	○	2.2	A						100L1	35	275		170	660	-	170	1000	400	430	3		64	1021	184	
	○	○	3	A						100L2	41	275		170	660	-	170	1000	400	430	3		64	1021	190	
	○	○	4	A						112M	50	275		170	660	-	170	1000	400	430	3		64	1036	199	
	○	○	5.5	A						132S	70	275		170	660	-	170	1000	400	430	3		63	1073	218	
	○	○	7.5	A						132M	77	275		170	660	-	170	1000	400	430	3		64	1111	226	
	○	○	11	A						160M	121	275		190	740	-	190	1120	440	470	3		85	1212	298	
	○	○	15	A						160L	129	275		190	740	-	190	1120	440	470	3		85	1256	306	
125-80-200	○		2.2	A	125	80	125	250	92	100L1	35	275	85	170	660	-	170	1000	400	430	3	4 × M12	64	1021	191	
	○	○	3	A						100L2	41	275		170	660	-	170	1000	400	430	3		64	1021	197	
	○	○	4	A						112M	50	275		170	660	-	170	1000	400	430	3		64	1036	206	
	○	○	5.5	A						132S	70	275		170	660	-	170	1000	400	430	3		63	1073	225	
	○	○	7.5	A						132M	77	275		170	660	-	170	1000	400	430	3		64	1111	233	
	○	○	11	A						160M	121	275		190	740	-	190	1120	440	470	3		85	1212	298	
	○	○	15	A						160L	129	275		190	740	-	190	1120	440	470	3		85	1256	306	
	○	○	18.5	A						180M	173	345		205	840	-	205	1250	490	530	3		96	1274	373	
125-80-250	○		4	A	125	80	125	280	104	112M	50	320	100	170	660	-	170	1000	440	470	3	4 × M12	73	1036	227	
	○	○	5.5	A						132S	70	320		170	660	-	170	1000	440	470	3		72	1073	246	
	○	○	7.5	A						132M	77	320		190	740	-	190	1120	440	470	3		75	1111	256	
	○	○	11	A						160M	121	345		205	840	-	205	1250	490	530	3	4 × M16	97	1212	322	
	○	○	15	A						160L	129	345		205	840	-	205	1250	490	530	3		110	1256	343	
	○	○	18.5	A						180M	173	345		205	840	-	205	1250	490	530	3		96	1274	373	
	○	○	22	A						200L	270	370		230	470	470	230	1400	550	590	4	6 × M16	121	1455	539	
	○	○	30	B						225S	305	370		230	470	470	230	1400	550	590	4		138	1505	591	
125-80-315	○		5.5	A	125	80	125	315	148	132S	70	345	100	170	660	-	170	1000	440	470	3	4 × M12	76	1103	294	
	○	○	7.5	A						132M	77	345		190	740	-	190	1120	440	470	3		80	1141	305	
	○	○	11	A						160M	121	370		205	840	-	205	1250	490	530	3	4 × M16	99	1242	368	
	○	○	15	A						160L	129	370		205	840	-	205	1250	490	530	3		113	1286	390	
	○	○	18.5	A						180M	173	370		205	840	-	205	1250	490	530	3		103	1304	424	
	○	○	22	A						180L	184	370		205	840	-	205	1250	490	530	3	104	1342	436		
	○	○	30	B						200L	270	370		230	470	470	230	1400	550	590	4	6 × M16	121	1455	539	
	○	○	37	B						225S	305	370		230	470	470	230	1400	550	590	4		138	1505	591	
125-80-400	○		11	A	125	80	125	355	199	160M	121	400	100	205	840	-	205	1250	490	530	3	4 × M16	103	1242	423	
	○	○	15	A						160L	129	400		205	840	-	205	1250	490	530	3		116	1286	444	
	○	○	18.5	A						180M	173	400		205	840	-	205	1250	490	530	3		106	1304	478	
	○	○	22	A						180L	184	400		205	840	-	205	1250	490	530	3	107	1342	490		
	○	○	30	B						200L	270	400		230	470	470	230	1400	550	590	4	6 × M16	125	1455	594	
	○	○	37	B						225S	305	400		230	470	470	230	1400	550	590	4		123	1505	627	
	○	○	45	B						225M	355	400		230	470	470	230	1400	550	590	4		130	1530	684	
	○	○	55	B						250M	451	400		230	470	470	230	1400	550	590	4	153	1588	803		
125-100-200	○		3	A	125	100	125	280	114	100L2	41	295	100	170	660	-	170	1000	440	470	3	4 × M12	71	1021	226	
	○	○	4	A						112M	50	295		170	660	-	170	1000	440	470	3		71	1036	235	
	○	○	5.5	A						132S	70	295		170	660	-	170	1000	440	470	3		70	1073	254	
	○	○	7.5	A						132M	77	295		190	740	-	190	1120	440	470	3	4 × M16	75	1111	266	
	○	○	11	A						160M	121	320		205	840	-	205	1250	490	530	3		115	1212	350	
	○	○	15	A						160L	129	320		205	840	-	205	1250	490	530	3		108	1256	351	
	○	○	18.5	A						180M	173	320		205	840	-	205	1250	490	530	3	105	1274	392		
	125-100-250	○		4						A	125	100		140	280	128	112M	50	320	100	170	660	-	170	1000	440
○		○	5.5	A	132S	70	320	170	660	-			170				1000	440	470		3	74	1118	272		
○		○	7.5	A	132M	77	320	190	740	-			190				1120	440	470		3	77	1156	282		
○		○	11	A	160M	121	345	205	840	-			205				1250	490	530		3	4 × M16	97	1257	346	
○		○	15	A	160L	129	345	205	840	-			205				1250	490	530		3		110	1301	367	
○		○	18.5	A	180M	173	345	205	840	-			205				1250	490	530		3		99	1319	400	
○		○	22	A	180L	184	345	205	840	-			205				1250	490	530		3	101	1357	413		
○		○	30	B	200L	270	345	230	470	470			230				1400	550	590		4	6 × M16	138	1470	536	

EBARA End Suction Volute Pump

Model GSO

DIMENSIONS - Dimensions of Pump with motor (4P)

C-9 rev.1

GSO - 4 Pole - 50Hz / 60Hz (3/4)

○ : Applicable

** : Dimension in mm

Model	Hz		Power	Fig.	Nozzle		Pump			Motor			BASE														Total (Approx.)					
	50	60	kW		dn1 **	dn2 **	a **	h2 **	Mass (kg)	Frame	Mass (kg)	H **	BJ **	BN1 **	BM1 **	BM2 **	BN2 **	BL **	BY **	BW **	T **	n x Fd	Mass (kg)	L **	Mass (kg)							
125-100-315	○		7.5	A	125	100	140	315	148	132M	77	345	100	190	740	-	190	1120	440	470	3	4 x M12	80	1156	305							
	○		11	A						160M	121	370		205	840	-	205	1250	490	530	3	4 x M16	99	1257	368							
	○	○	15	A						160L	129	370		205	840	-	205	1250	490	530	3		113	1301	390							
	○	○	18.5	A						180M	173	370		205	840	-	205	1250	490	530	3		103	1319	424							
	○	○	22	A						180L	184	370		205	840	-	205	1250	490	530	3	104	1357	436								
	○	○	30	B						200L	270	370		230	470	470	230	1400	550	590	4	123	1470	541								
	○	○	37	B						225S	305	370		230	470	470	230	1400	550	590	4	6 x M16	141	1520	594							
	○	○	45	B						225M	355	370		230	470	470	230	1400	550	590	4		141	1545	644							
	125-100-400	○		11						A	125	100		140	355	203	160M	121	400	120	205	840	-	205	1250	550	590	3	4 x M16	110	1257	434
		○		15						A							160L	129	400		205	840	-	205	1250	550	590	3	4 x M16	124	1301	456
○			18.5	A	180M	173	400	205	840	-			205				1250	550	590		3	114	1319	490								
○		○	22	B	180L	184	400	230	470	470			230				1400	550	590		3	6 x M16	119	1357	506							
○		○	30	B	200L	270	400	230	470	470			230				1400	550	590		4		130	1470	603							
○		○	37	B	225S	305	400	230	470	470			230				1400	550	590		4		127	1520	635							
○		○	45	B	225M	355	400	230	470	470			230				1400	550	590		4		134	1545	692							
○		○	55	B	250M	451	400	230	470	470			230				1400	550	590		4	158	1603	812								
○		○	75	B	280S	598	420	270	530	530			270				1600	600	640		4	6 x M20	179	1681	980							
○		○	90	B	280M	684	420	270	530	530			270				1600	600	640		4		187	1729	1074							
150-125-200	○		5.5	A	150	125	140	315	141	132S	70	345	100	170	660	-	170	1000	440	470	3	4 x M12	76	1118	287							
	○	○	7.5	A						132M	77	345		190	740	-	190	1120	440	470	3	4 x M16	80	1156	298							
	○	○	11	A						160M	121	370		205	840	-	205	1250	490	530	3		99	1257	361							
	○	○	15	A						160L	129	370		205	840	-	205	1250	490	530	3		113	1301	383							
	○	○	18.5	A						180M	173	370		205	840	-	205	1250	490	530	3	99	1319	413								
	○	○	22	A						180L	184	370		205	840	-	205	1250	490	530	3	104	1357	429								
	○		5.5	A						132S	70	345		170	660	-	170	1000	440	470	3	4 x M16	76	1118	306							
	○	○	7.5	A						132M	77	345		190	740	-	190	1120	440	470	3		80	1156	317							
	○	○	11	A						160M	121	370		205	840	-	205	1250	490	530	3		99	1257	380							
	○	○	15	A						160L	129	370		205	840	-	205	1250	490	530	3	113	1301	402								
150-125-250	○	○	18.5	A	150	125	140	355	160	180M	173	370	100	205	840	-	205	1250	490	530	3	4 x M16	103	1319	436							
	○	○	22	A						180L	184	370		205	840	-	205	1250	490	530	3	104	1357	448								
	○	○	30	B						200L	270	370		230	470	470	230	1400	550	590	4	123	1470	553								
	○	○	37	B						225S	305	370		230	470	470	230	1400	550	590	4	141	1520	606								
	○	○	45	B						225M	355	370		230	470	470	230	1400	550	590	4	141	1545	656								
	150-125-315	○		11						A	150	125		140	355	187	160M	121	400	120	205	840	-	205	1250	550	590	3	4 x M16	110	1257	418
		○	○	15						A							160L	129	400		205	840	-	205	1250	550	590	3	4 x M16	125	1301	441
		○	○	18.5						A							180M	173	400		205	840	-	205	1250	550	590	3		110	1319	470
		○	○	22						B							180L	184	400		230	470	470	230	1400	550	590	3		120	1357	491
		○	○	30						B							200L	270	400		230	470	470	230	1400	550	590	4	130	1470	587	
○		○	37	B	225S	305	400	230	470	470			230				1400	550	590		4	6 x M16	127	1520	619							
○		○	45	B	225M	355	400	230	470	470			230				1400	550	590		4		127	1545	669							
○		○	55	B	250M	451	400	230	470	470			230				1400	600	640		4	163	1603	801								
○		○	75	B	280S	598	420	270	530	530			270				1600	600	640		4	6 x M20	180	1681	965							
150-125-400		○		18.5	A	150	125	140	400	224			180M				173	435	120		205	840	-	205	1250	550	590	3	4 x M16	117	1319	514
	○		22	B	180L						184	435	230	470	470	230	1400	550		590	3	6 x M16	125	1357	533							
	○		30	B	200L						270	435	230	470	470	230	1400	550		590	4		135	1470	629							
	○	○	37	B	225S						305	435	230	470	470	230	1400	550		590	4		140	1520	669							
	○	○	45	B	225M						355	435	230	470	470	230	1400	550		590	4	140	1545	719								
	○	○	55	B	250M						451	455	270	530	530	270	1600	600		640	4	181	1603	856								
	○	○	75	B	280S						598	455	270	530	530	270	1600	600		640	4	216	1681	1038								
	○		90	B	280M						684	455	270	530	530	270	1600	670		710	4	6 x M20	230	1729	1138							
	○		110	B	315S						1210	460	270	530	530	270	1600	670		710	4		225	1836	1659							
	○	○	132	B	315M						1240	460	300	600	600	300	1800	670		710	4	239	1936	1703								
150-125-500	○		30	B	150	125	180	450	347	200L	270	515	120	270	530	530	270	1600	600	640	4	6 x M20	186	1650	803							
	○		37	B						225S	305	515		270	530	530	270	1600	600	640	4		183	1700	835							
	○		45	B						225M	355	515		270	530	530	270	1600	600	640	4		181	1725	883							
	○	○	55	B						250M	451	515		270	530	530	270	1600	600	640	4		184	1783	982							
	○	○	75	B						280S	598	515		270	530	530	270	1600	600	640	4		200	1861	1145							
	○		90	B						280M	684	515		300	600	600	300	1800	670	710	4		226	1909	1257							
	○	○	110	B						315S	1210	515		300	600	600	300	1800	670	710	4		247	2016	1804							
	○		132	B						315M	1240	515		220	740	740	220	1920	670	710	4		259	2116	1846							
	○	○	160	B						315L1	1390	515		220	740	740	220	1920	670	710	4		259	2116	1996							
	200-150-250	○		11						A	200	150		160	375	193	160M	121	400	120	205		840	-	205	1250	550	590	3	4 x M16	112	1277
○			15	A	160L	129	400	205	840	-			205				1250	550	590		3	125	1321	447								
○		○	18.5	A	180M	173	400	205	840	-			205				1250	550	590		3	114	1339	480								
○		○	22	B	180L	184	400	230	470	470			230				1400	550	590		3	120	1377	497								
○		○	30	B	200L	270	400	230	470	470			230				1400	550	590		4	131	1490	594								
○		○	37	B	225S	305	400	230	470	470			230				1400	550	590		4	6 x M16	136	1540	634							
○		○	45	B	225M	355	400	230	470	470			230				1400	550	590		4	136	1565	684								
○			55	B	250M	451	400	230	470	470			230				1400	550	590		4	160	1623	804								
○			75	B	280S	598	420	270	530	530			270				1600	600	640		4	6 x M20	180	1701	971							

DIMENSIONS - Dimensions of Pump with motor (4P)

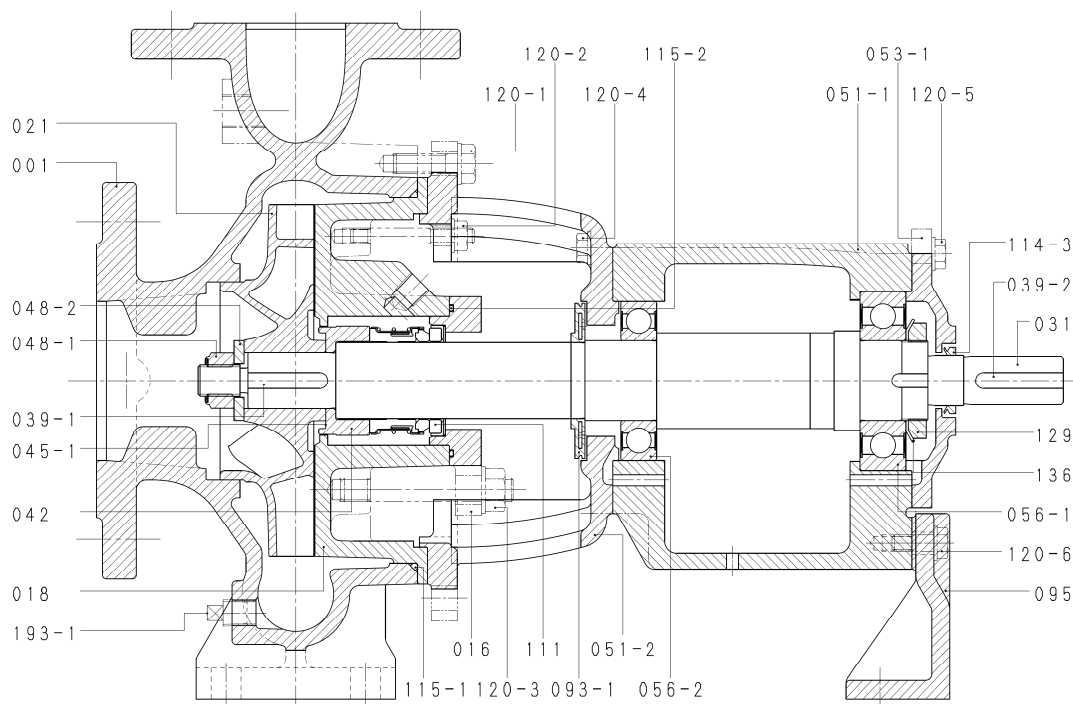
C-10 rev.1

GSO - 4 Pole - 50Hz / 60Hz (4/4)

○ : Applicable

** : Dimension in mm

Model	Hz		Power kW	Fig.	Nozzle		Pump			Motor			BASE												Total (Approx.)		
	50	60			dn1 **	dn2 **	a **	h2 **	Mass (kg)	Frame	Mass (kg)	H **	BJ **	BN1 **	BM1 **	BM2 **	BN2 **	BL **	BY **	BW **	T **	n x Fd	Mass (kg)	L **	Mass (kg)		
200-150-315	○		18.5	B	200	150	160	400	264	180M	173	435	120	230	470	470	230	1400	600	640	3	6 x M16	128	1479	565		
	○		22	B						180L	184	435		230	470	470	230	1400	600	640	3		136	1517	584		
	○	○	30	B						200L	270	455		270	530	530	270	1600	600	640	4		179	1630	713		
	○	○	37	B						225S	305	455		270	530	530	270	1600	600	640	4		181	1680	750		
	○	○	45	B						225M	355	455		270	530	530	270	1600	600	640	4		181	1705	800		
	○	○	55	B						250M	451	455		270	530	530	270	1600	600	640	4	6 x M20	182	1763	897		
	○	○	75	B						280S	598	455		270	530	530	270	1600	600	640	4		218	1841	1080		
	○	○	90	B						280M	684	455		270	580	580	270	1700	600	640	4		228	1889	1176		
	○	○	110	B						315S	1210	460		300	600	600	300	1800	670	710	4		235	1996	1709		
	○	○	132	B						315M	1240	460		220	740	740	220	1920	670	710	4		247	2096	1823		
200-150-400	○		30	B	200	150	160	450	336	200L	270	455	120	270	530	530	270	1600	600	640	4	6 x M20	179	1630	785		
	○		37	B						225S	305	455		270	530	530	270	1600	600	640	4		181	1680	822		
	○	○	45	B						225M	355	455		270	530	530	270	1600	600	640	4		181	1705	872		
	○	○	55	B						250M	451	455		270	530	530	270	1600	600	640	4		182	1763	969		
	○	○	75	B						280S	598	455		270	530	530	270	1600	600	640	4		219	1841	1153		
	○	○	90	B						280M	684	455		270	580	580	270	1700	600	640	4	228	1889	1248			
	○	○	110	B						315S	1210	460		300	600	600	300	1800	670	710	4	235	1996	1781			
	○	○	132	B						315M	1240	460		220	740	740	220	1920	670	710	4	247	2096	1823			
	○	○	160	B						315L1	1390	460		220	740	740	220	1920	670	710	4	247	2096	1973			
	200-150-500	○		45						B	200	150		180	560	456	225M	355	515	120	270	530	530	270	1600	600	640
○			55	B	250M	451	515	270	530	530			270				1600	600	640		4	196	1813	1103			
○			75	B	280S	598	515	270	580	580			270				1700	600	640		4	213	1891	1267			
○		○	90	B	280M	684	515	300	600	600			300				1800	670	710		4	227	1939	1367			
○		○	110	B	315S	1210	515	300	600	600			300				1800	670	710		4	248	2046	1914			
○		○	132	B	315M	1240	515	220	740	740			220				1920	670	710		4	260	2146	1956			
○		○	160	B	315L1	1390	515	220	740	740			220				1920	670	710		4	260	2146	2106			
○		○	185	B	315L2	1420	515	220	740	740			220				1920	670	710		4	277	2146	2153			
○		○	200	B	315L3	1440	515	220	740	740			220				1920	670	710		4	277	2146	2173			
○		○	220	B	355M1	1645	555	220	800	800			220				2040	750	800		4	6 x M24	402	2346	2503		
○		○	250	B	355M2	1665	555	220	800	800			220				2040	750	800		4		402	2346	2523		
○		○	280	B	355L1	1758	555	220	870	870			220				2180	750	800		4		436	2516	2650		
○		○	315	B	355L2	1815	555	220	870	870			220				2180	750	800		5		471	2516	2742		
250-200-400		○		75	B	250	200	180	560	445			280S				598	530	220		300		600	600	300	1800	680
	○		90	B	280M						684	530	300	600	600	300	1800	680		720	4		242	1939	1371		
	○	○	110	B	315S						1210	530	220	740	740	220	1920	680		720	4		267	2046	1922		
	○	○	132	B	315M						1240	530	220	800	800	220	2040	680		720	4	281	2146	1966			
	○	○	160	B	315L1						1390	530	220	800	800	220	2040	680		720	4	296	2146	2131			
	○	○	185	B	315L2						1420	530	220	800	800	220	2040	680		720	4	296	2146	2161			
	○	○	200	B	315L3						1440	530	220	800	800	220	2040	680		720	4	296	2146	2181			
	○	○	220	B	355M1						1645	570	220	870	870	220	2180	750		800	4	456	2346	2546			
	○	○	250	B	355M2						1665	570	220	870	870	220	2180	750		800	4	456	2346	2566			
	○	○	280	B	355L1						1758	570	220	970	970	220	2380	750		800	4	6 x M24	503	2516	2706		
○	○	315	B	355L2	1815	570	220	970	970	220	2380	750	800	5	538	2516	2798										
○	○	355	B	355L1	1995	570	220	970	970	220	2380	750	800	5	580	2556	3020										
○	○	375	B	355L2	2085	570	220	970	970	220	2380	750	800	5	580	2556	3110										
○	○	400	B	Later																							
250-200-500	○		90	B	250	200	200	630	534	280M	684	580	220	220	740	740	220	1920	680	720	4	6 x M20	278	1999	1496		
	○		110	B						315S	1210	580		220	740	740	220	1920	680	720	4		273	2106	2017		
	○		132	B						315M	1240	580		220	800	800	220	2040	680	720	4		297	2206	2071		
	○	○	160	B						315L1	1390	580		220	800	800	220	2040	680	720	4		314	2206	2238		
	○	○	185	B						315L2	1420	580		220	800	800	220	2040	680	720	4		314	2206	2268		
	○	○	200	B						315L3	1440	580		220	800	800	220	2040	680	720	4	314	2206	2288			
	○	○	220	B						355M1	1645	620		220	870	870	220	2180	750	800	4	432	2406	2611			
	○	○	250	B						355M2	1665	620		220	870	870	220	2180	750	800	4	467	2406	2666			
	○	○	280	B						355L1	1758	620		220	970	970	220	2380	750	800	4	479	2576	2771			
	○	○	315	B						355L2	1815	620		220	970	970	220	2380	750	800	5	479	2577	2828			
	○	○	355	B						355L1	1995	620		220	970	970	220	2380	750	800	5	523	2617	3052			
	○	○	375	B						355L2	2085	620		220	970	970	220	2380	750	800	5	523	2616	3142			
	○	○	400	B						Later																	

Standard feature**Mechanical seal type with grease lubrication bearings**

NO.	NAME OF PART	Q'ty
001	CASING	1
016	SEAL GLAND PLATE	1
018	GLAND COVER	1
021	IMPELLER	1
031	SHAFT	1
039-1	KEY - IMPELLER	1
039-2	KEY - COUPLING	1
042	SEAL SPACER	1
045-1	IMPELLER SHIM	1 set
045-5	BEARING DISTANCE (*1)	1
048-1	IMPELLER NUT	1
048-2	IMPELLER WASHER	1
051-1	BEARING HOUSING	1
051-2	ADAPTER - BG HOUSING (*2)	1
051-3	BRACKET - CASING (*3)	1
053-1	BEARING COVER (M)	1
053-2	BEARING COVER (P) (*4)	1

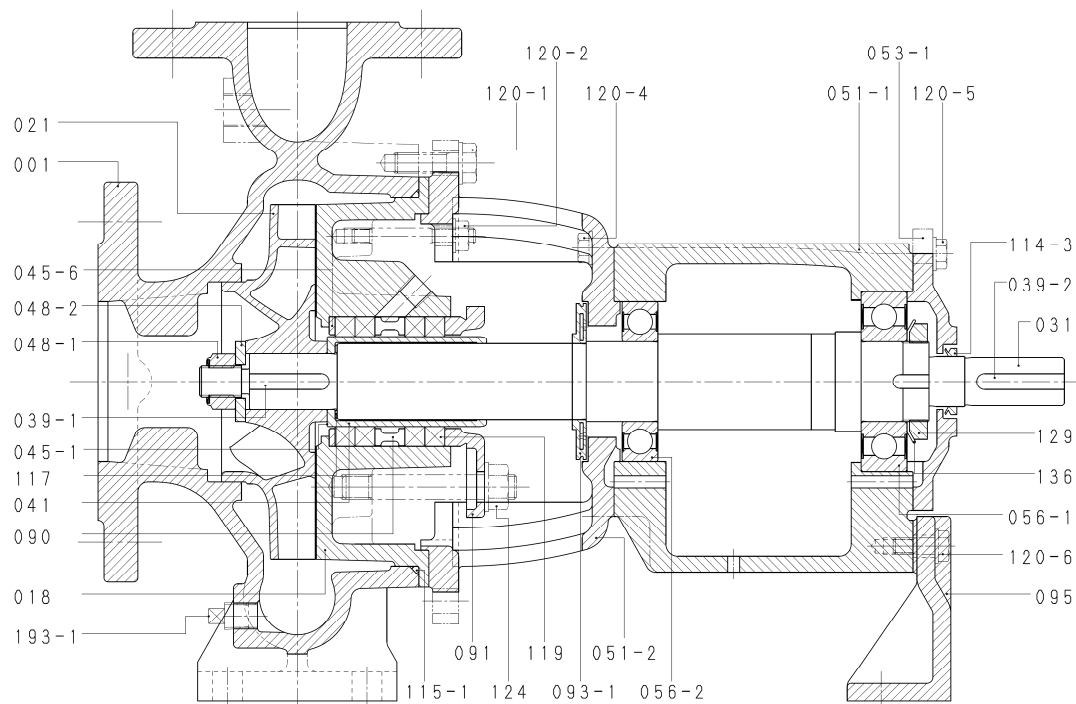
(*1) SHAFT NO. 75AB only

(*2) SHAFT NO. 40, 50, 60 only

(*3) for SHAFT NO. 75AB, 90 except 200-150-315

(*4) SHAFT NO. 75AB, 90 only

NO.	NAME OF PART	Q'ty
056-1	BALL BEARING (M)	1
056-2	BALL BEARING (P)	1
093-1	DEFLECTOR	1
095	STAY	1
111	MECHANICAL SEAL	1 set
114-3	V RING - BG COVER	1
115-1	O-RING - GLAND COVER	1
115-2	O-RING - GLAND PLATE	1
120-1	BOLT - CASING	1 set
120-2	BOLT/NUT - GLAND COVER	1 set
120-3	BOLT/NUT - GLAND PLATE	4
120-4	BOLT - BG HOUSING	4
120-5	BOLT - BG COVER	4
120-6	BOLT - STAY	2
129	BEARING NUT	1
136	BEARING WASHER	1
193-1	PLUG - CASING	1

Standard feature**Gland packing type with grease lubrication bearings**

NO.	NAME OF PART	Q'ty	NO.	NAME OF PART	Q'ty
001	CASING	1	056-2	BALL BEARING (P)	1
018	GLAND COVER	1	90	LANTERN RING	1
021	IMPELLER	1	091	GLAND	1
031	SHAFT	1	093-1	DEFLECTOR	1
039-1	KEY - IMPELLER	1	095	STAY	1
039-2	KEY - COUPLING	1	114-3	V RING - BG COVER	1
041	PACKING SLEEVE	1	115-1	O-RING - GLAND COVER	1
045-1	IMPELLER SHIM	1 set	117	GASKET - PK SLEEVE	1
045-5	BEARING DISTANCE (*1)	1	119	GLAND PACKING	1 set
045-6	SPACER - GPK	1	120-1	BOLT - CASING	1 set
048-1	IMPELLER NUT	1	120-2	BOLT/NUT - GLAND COVER	1 set
048-2	IMPELLER WASHER	1	120-4	BOLT - BG HOUSING	4
051-1	BEARING HOUSING	1	120-5	BOLT - BG COVER	4
051-2	ADAPTER - BG HOUSING (*2)	1	120-6	BOLT - STAY	2
051-3	BRACKET - CASING (*3)	1	124	GLAND BOLT	2
053-1	BEARING COVER (M)	1	129	BEARING NUT	1
053-2	BEARING COVER (P) (*4)	1	136	BEARING WASHER	1
056-1	BALL BEARING (M)	1	193-1	PLUG - CASING	1

(*1) SHAFT NO. 75AB only

(*2) SHAFT NO. 40, 50, 60 only

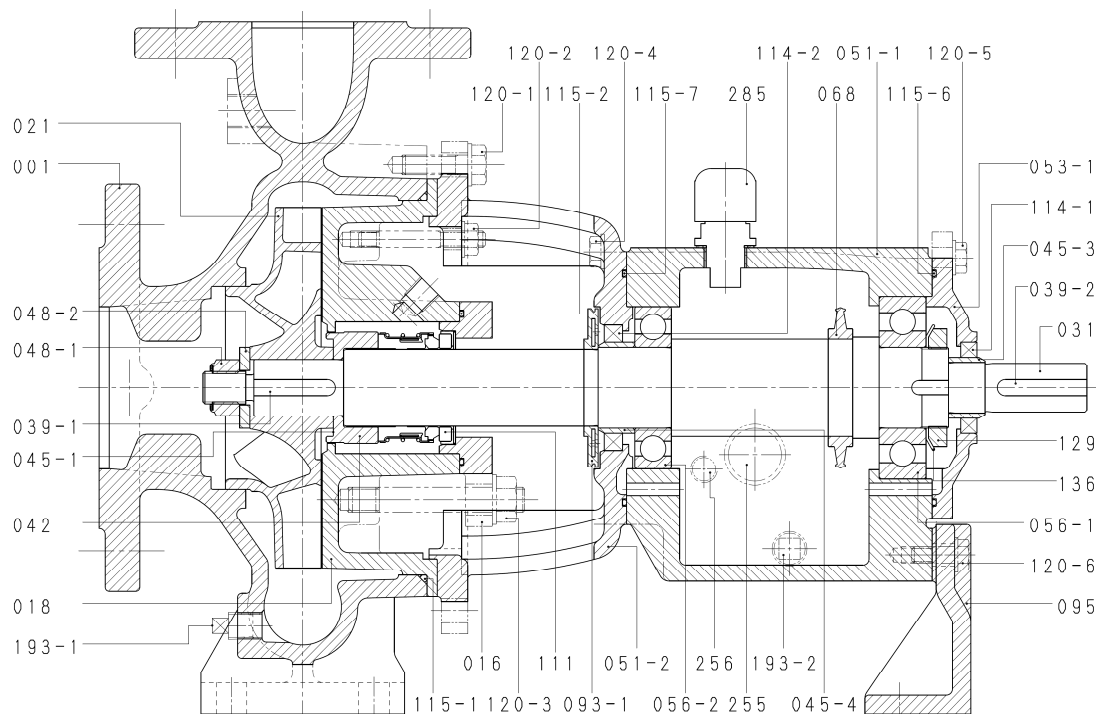
(*3) for SHAFT NO. 75AB, 90 except 200-150-315

(*4) SHAFT NO. 75AB, 90 only

CONSTRUCTION - Sectional view

D-3

Optional feature

Mechanical seal type with oil lubrication bearings

NO.	NAME OF PART	Q'ty
001	CASING	1
016	SEAL GLAND PLATE	1
018	GLAND COVER	1
021	IMPELLER	1
031	SHAFT	1
039-1	KEY - IMPELLER	1
039-2	KEY - COUPLING	1
042	SEAL SPACER	1
045-1	IMPELLER SHIM	1 set
045-3	OIL SEAL SLEEVE (M)	1
045-4	OIL SEAL SLEEVE (P)	1
045-5	BEARING DISTANCE (*1)	1
048-1	IMPELLER NUT	1
048-2	IMPELLER WASHER	1
051-1	BEARING HOUSING	1
051-2	ADAPTER - BG HOUSING (*2)	1
051-3	BRACKET - CASING (*3)	1
053-1	BEARING COVER (M)	1
053-2	BEARING COVER (P) (*4)	1
056-1	BALL BEARING (M)	1
056-2	BALL BEARING (P)	1
068	OIL FLINGER	1

(*1) SHAFT NO. 75AB only

(*2) SHAFT NO. 40, 50, 60 only

(*3) for SHAFT NO. 75AB, 90 except 200-150-315

(*4) SHAFT NO. 75AB, 90 only

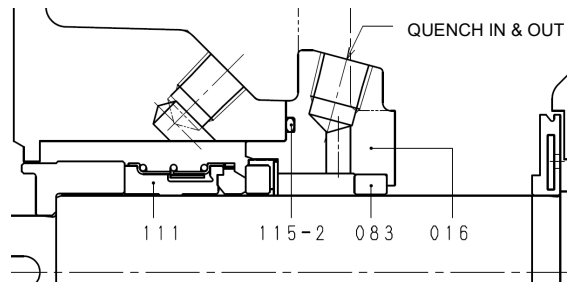
NO.	NAME OF PART	Q'ty
093-1	DEFLECTOR	1
095	STAY	1
111	MECHANICAL SEAL	1 set
114-1	OIL SEAL (M)	1
114-2	OIL SEAL (P)	1
115-1	O-RING - GLAND COVER	1
115-2	O-RING - GLAND PLATE	1
115-6	O-RING - BG COVER(M)	1
115-7	O-RING - BG COVER (P)	1
120-1	BOLT - CASING	1 set
120-2	BOLT/NUT - GLAND COVER	1 set
120-3	BOLT/NUT - GLAND PLATE	4
120-4	BOLT - BG HOUSING	4
120-5	BOLT - BG COVER	4
120-6	BOLT - STAY	2
129	BEARING NUT	1
136	BEARING WASHER	1
193-1	PLUG - CASING	1
193-2	PLUG - OIL DRAIN (*5)	1
193-3	PLUG - OILER	1
255	OIL LEVEL GAUGE	1
256	CONSTANT LEVEL OILER (*6)	1 set
285	AIR BREATHER	1

(*5) MAGNETIC TYPE

(*6) OPTIONAL

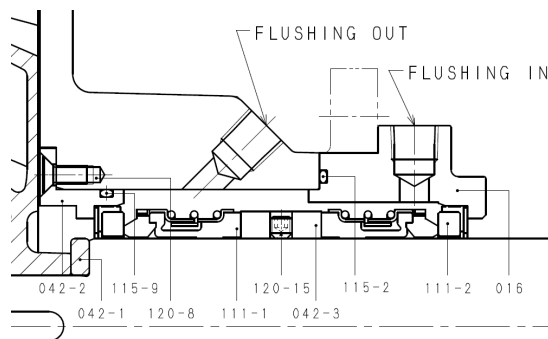
CONSTRUCTION - Sectional view

D-3A rev.2

Optional Mechanical Seal**1. Standard Type - Quench**

NO.	NAME OF PART	Q'ty
016	SEAL GLAND PLATE	1
083	THROTTLE BUSHING (*1)	1
111	MECHANICAL SEAL	1 set
115-2	O-RING - GLAND PLATE	1

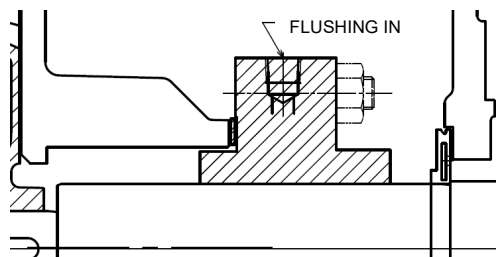
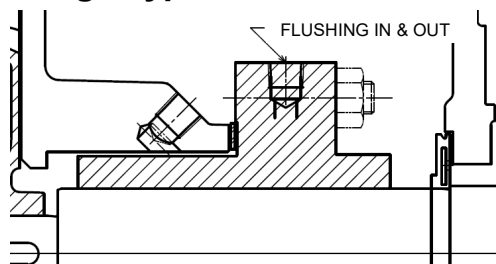
(*1) Standard material is CARBON.

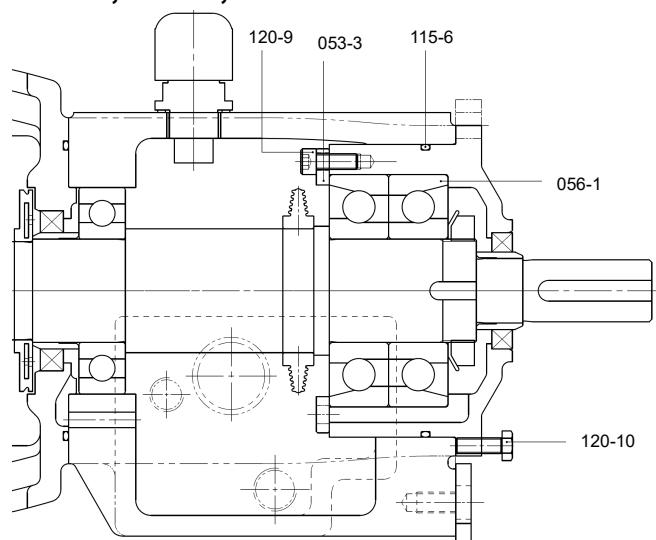
2. Standard Type - Double Seal

NO.	NAME OF PART	Q'ty
016	SEAL GLAND PLATE	1
042-1	DISTANCE PIECE	1
042-2	SEAL ADAPTOR	1
042-3	SEAL SET RING	1
111-1	MECHANICAL SEAL	1 set
111-2	MECHANICAL SEAL	1 set
115-2	O-RING - GLAND PLATE	1
115-9	O-RING - SEAL ADAPTOR	1
120-8	BOLT - SEAL ADAPTOR	1 set
120-15	SET SCREW - SEAL SET RING	2

rev.1

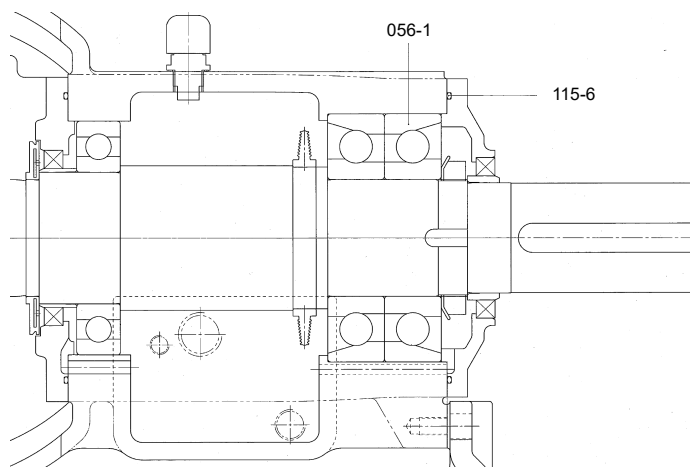
rev.1

3. Cartridge Type - Single Seal**4. Cartridge Type - Double Seal**

Optional feature - Heavy Duty Bearing**1. Shaft No. 40, 50AB, 60**

NO.	NAME OF PART	Q'ty
053-3	STOPPER - BG (M)	1
056-1	BALL BEARING (M) (*1)	1 set
115-6	O-RING - BG COVER (M)	1
120-9	BOLT - BG STOPPER	1 set
120-10	BOLT - for DISASSEMBLY	2

(*1) Shaft No. 40 : 7308BDB
Shaft No. 50AB : 7311BDB
Shaft No. 60 : 7313BDB

2. Shaft No. 75AB, 90

NO.	NAME OF PART	Q'ty
056-1	BALL BEARING (M) (*2)	1 set
115-6	O-RING - BG COVER (M)	1

(*2) Shaft No. 75AB & 90 : 7316BDB

Materials of mechanical seal application with grease(shield) lubrication

No.	Name of part	Material	JIS Material EQ.	ASTM EQ.	Remarks
001	CASING	304 Stainless steel	SCS13	A351-CF8	
		316 Stainless steel	SCS14A	A351-CF8M	
014	HANDHOLE COVER	304 Stainless steel	SCS13	A351-CF8	
		316 Stainless steel	SCS14A	A351-CF8M	
016	SEAL GLAND PLATE	316 Stainless steel	SCS14A	A351-CF8M	
018	GLAND COVER	304 Stainless steel	SCS13	A351-CF8	
		316 Stainless steel	SCS14A	A351-CF8M	
021	IMPELLER	304 Stainless steel	SCS13	A351-CF8	
		316 Stainless steel	SCS14A	A351-CF8M	
031	SHAFT	304 Stainless steel	SUS304	A276-304	
		316 Stainless steel	SUS316	A276-316	
039-1	KEY - IMPELLER	316 Stainless steel	SUS316	A276-316	
039-2	KEY - COUPLING	Carbon steel	S50C	A576-1050	
042	SEAL SPACER	316 Stainless steel	SCS14A	A351-CF8M	
045-1	IMPELLER SHIM	316 Stainless steel	SUS316	A276-316	
045-5	BEARING DISTANCE	Carbon steel	SS400	A283 Gr. D	(*1)
048-1	IMPELLER NUT	316 Stainless steel	SUS316	A276-316	
048-2	IMPELLER WASHER	316 Stainless steel	SUS316	A276-316	
051-1	BEARING HOUSING	Cast iron	FC200	A48-30	
051-2	ADAPTER - BG HOUSING	Cast iron	FC200	A48-30	(*2)
051-3	BRACKET - CASING	Cast iron	FC200	A48-30	(*3)
053-1	BEARING COVER (M)	Cast iron	FC200	A48-30	
053-2	BEARING COVER (P)	Cast iron	FC200	A48-30	(*4)
056-1	BALL BEARING (M)	Steel			(*5)
056-2	BALL BEARING (P)	Steel			(*5)
093-1	DEFLECTOR	EPDM			
095	STAY	Carbon steel or Ductile cast irons	SPHC or FCD400	A569 or A536-60-40-18	
111	MECHANICAL SEAL	Sic / carbon / FKM			
		Sic / Sic / FKM			Optional
		Sic / carbon / EPDM			Optional
114-3	V-RING - BG COVER	NBR			
115-1	O-RING - GLAND COVER	FKM			
115-2	O-RING - GLAND PLATE	EPDM			Optional
115-8	O-RING - HANDHOLE COVER	FFKM or PTFE			Optional
120-1	BOLT - CASING	Carbon steel	SS	A283-D	
120-2	BOLT/NUT - GLAND COVER	Carbon steel	SS	A283-D	
120-3	BOLT/NUT - GLAND PLATE	Carbon steel	SS	A283-D	
120-4	BOLT - BG HOUSING	Carbon steel	SS	A283-D	
120-5	BOLT - BG COVER	Carbon steel	SS	A283-D	
120-6	BOLT - STAY	Carbon steel	SS	A283-D	
120-7	BOLT/NUT - HANDHOLE COVER	Carbon steel	SS	A283-D	
129	BEARING NUT	Carbon steel	SS	A283-D	
136	BEARING WASHER	Carbon steel	SS	A283-D	
193-1	PLUG - CASING	316 Stainless steel	SUS316	A276-316	

(*1) SHAFT NO. 75AB only

(*3) for SHAFT NO. 75AB, 90 except 200-150-315

(*2) SHAFT NO. 40, 50, 60 only

(*4) SHAFT NO. 75AB, 90 only

(*5) Deep groove ball bearing, single row / Vacuum degassed steel / Grease shield type
/ NSK ENS grease type eq.

Materials of gland packing application with grease(shield) lubrication (*1)

No.	Name of part	Material	JIS Material EQ.	ASTM EQ.	Remarks
018	GLAND COVER	304 Stainless steel	SCS13	A351-CF8	
		316 Stainless steel	SCS14A	A351-CF8M	
041	PACKING SLEEVE	316 Stainless steel	SUS316	A276-316	
		304 Stainless steel	SUS304	A276-304	
045-6	SPACER - GPK	316 Stainless steel	SUS316	A276-316	
90	LANTERN RING	316 Stainless steel	SUS316	A276-316	
091	GLAND	316 Stainless steel	SCS14	A351-CF8M	
117	GASKET - PK SLEEVE	Graphite w/s. steel sheet			
119	GLAND PACKING	Carbonized fiber packing (P#6501L eq.)			see D-6
124	GLAND BOLT	316 Stainless steel	SUS316	A276-316	

(*1) The components which constitute the gland packing pump are these parts instead of P/N 016, 018, 042, 111, 115-2 and 120-3 of the mechanical seal pump.

Materials of mechanical seal application with oil lubrication (*2)

No.	Name of part	Material	JIS Material EQ.	ASTM EQ.	Remarks
045-3	OIL SEAL SLEEVE (M)	Carbon steel	S50C	A576-1050	
045-4	OIL SEAL SLEEVE (P)	Carbon steel	S50C	A576-1050	
051-1	BEARING HOUSING	Cast iron	FC200	A48-30	
051-2	ADAPTER - BG HOUSING	Cast iron	FC200	A48-30	(*3)
053-1	BEARING COVER (M)	Cast iron	FC200	A48-30	
053-2	BEARING COVER (P)	Cast iron	FC200	A48-30	(*4)
056-1	BALL BEARING (M)	Steel			(*5)
056-2	BALL BEARING (P)	Steel			(*5)
068	OIL FLINGER	NBR			
114-1	OIL SEAL (M)	NBR			
114-2	OIL SEAL (P)	NBR			
115-6	O-RING - BG COVER(M)	NBR			
115-7	O-RING - BG COVER (P)	NBR			
193-2	PLUG - OIL DRAIN	Stainless steel / Magnet			Magnetic type
193-3	PLUG - OILER	Carbon steel			
255	OIL LEVEL GAUGE	Poly carbonate / NBR			
256	CONSTANT LEVEL OILER	Zinc die-cast and glass			Optional
285	AIR BREATHER	Poly carbonate / NBR			

(*2) The components which constitute the oil lubrication pump are these parts instead of P/N 051-1, 051-2, 053-1, 053-2, 056-1, 056-2 and 114-3 of the grease lubrication pump.

(*3) SHAFT NO. 40, 50, 60 only

(*4) SHAFT NO. 75AB, 90 only

(*5) Deep groove ball bearing, single row / Vacuum degassed steel

1. Mechanical seal lineup (* 1)

Basic style: Unbalanced type, Internal arrangement,

Gland cover non-water-cooled structure

Mechanical seal type (* 3)		without seal sleeve	with seal sleeve
Single (* 2)	EB	Standard	---
	CS	Optional	---
Single cartridge (* 2)	CS	---	Optional
Double (back to back)	EB	Semi-standard	---
Double cartridge	CS	---	Optional

(* 1) For other lineups, please contact the engineering center.

(* 2) With QUENCH is applied as a semi-standard.

(* 3) EB : Mono coil / rubber bellows

CS : Coil spring / O ring

2. Material of mechanical seal (* 4)

(1) Face materials

Standard : Sic / Carbon

Semi-standard : Sic / Sic

(2) Rubber parts material

Standard : FKM

Semi-standard : EPDM

Optional : FFKM

(* 4) Please consult with the engineering center for other materials.

3. Soft packing

(1) Materials

Standard : Carbonized fiber packing (P#6501L EQ.)

Optional : PTFE (P#436 EQ.) or P#4526L EQ or **P#4527L EQ**

(2) Arrangement

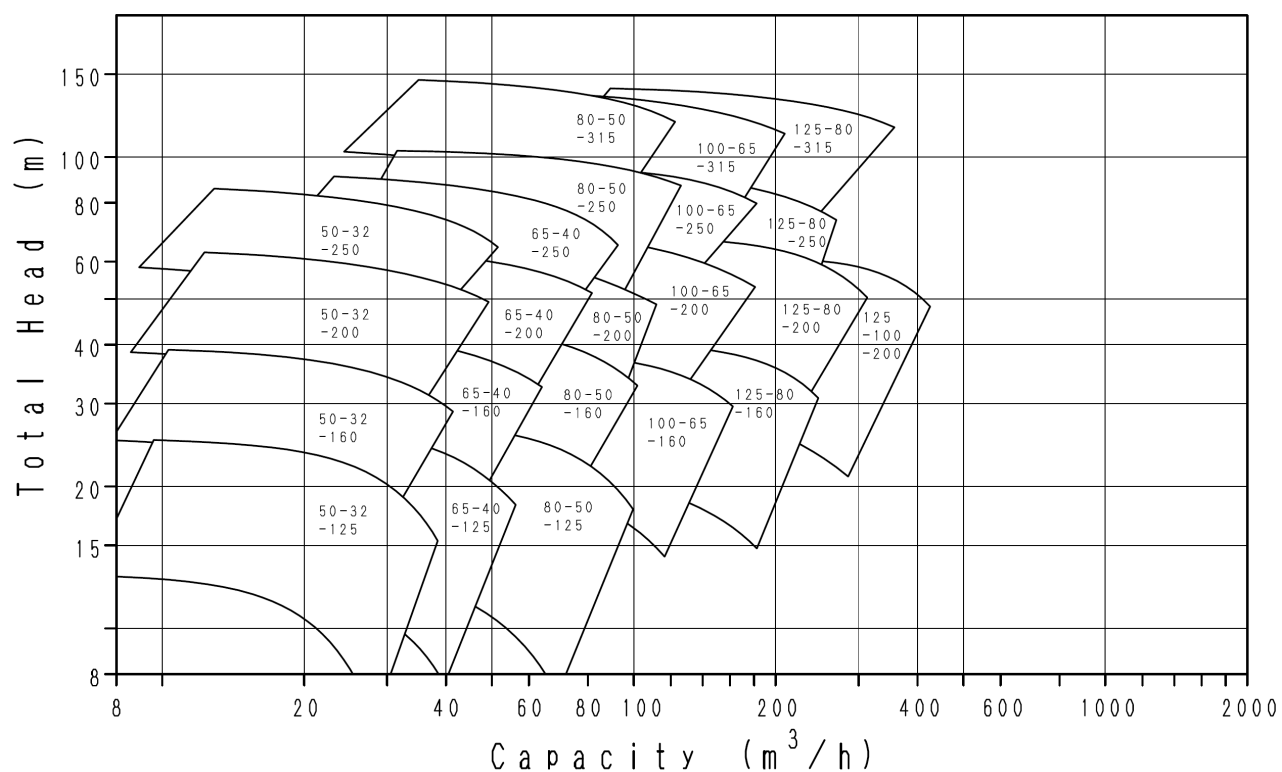
2 soft packing + lantern ring + 2 soft packing

(3) Other

- Depending on suction pressure and box pressure, it may not be possible to adopt a soft packing structure.
- It can not be used for metallic soft packing.
- It can not be used for the soft packing structure for the slurry containing liquid or the liquid where crystals are deposited.
- It does not correspond to the QUENCH structure.
- It does not correspond to the split type gland structure.

SELECTION CHART

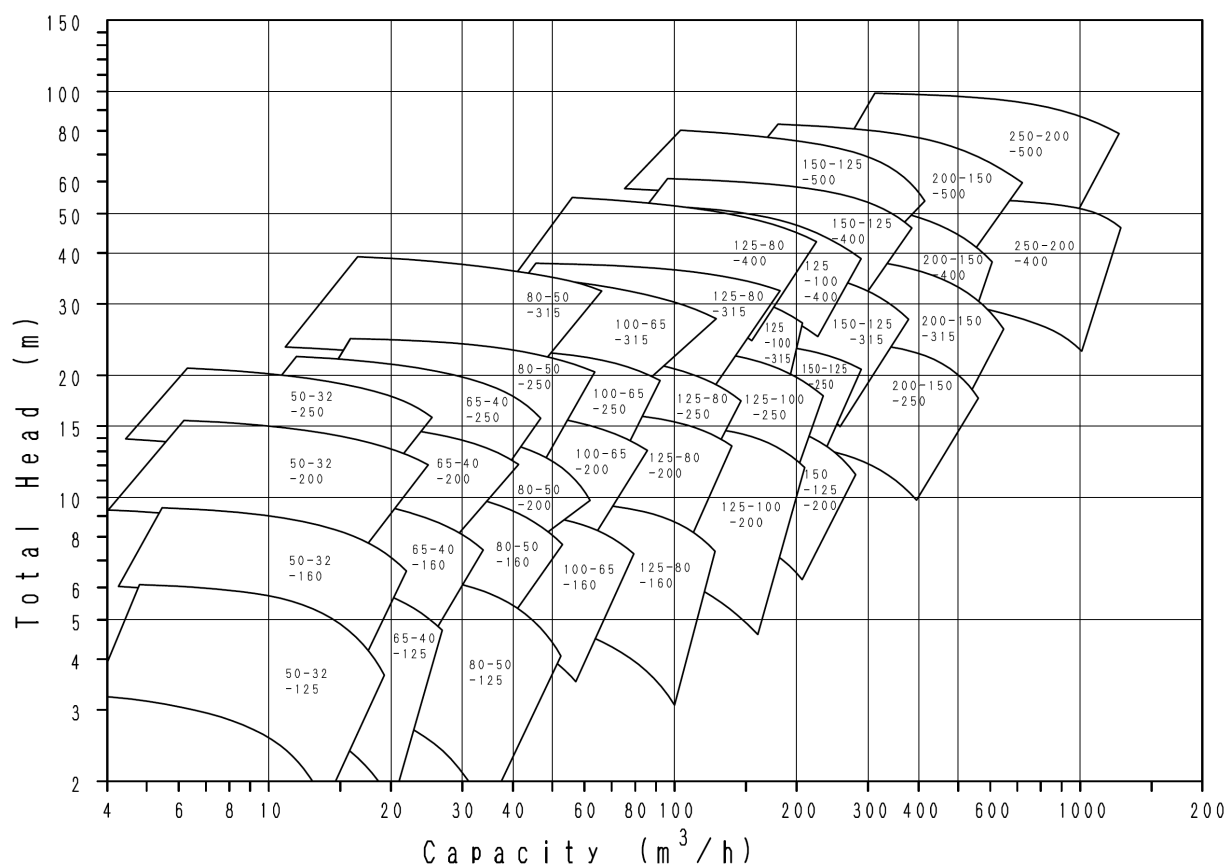
E-1

50Hz – 2950min⁻¹

Note : When selecting a pump , NPSH Av. should have a safety margin of at least 0.5m from NPSH Re.

SELECTION CHART

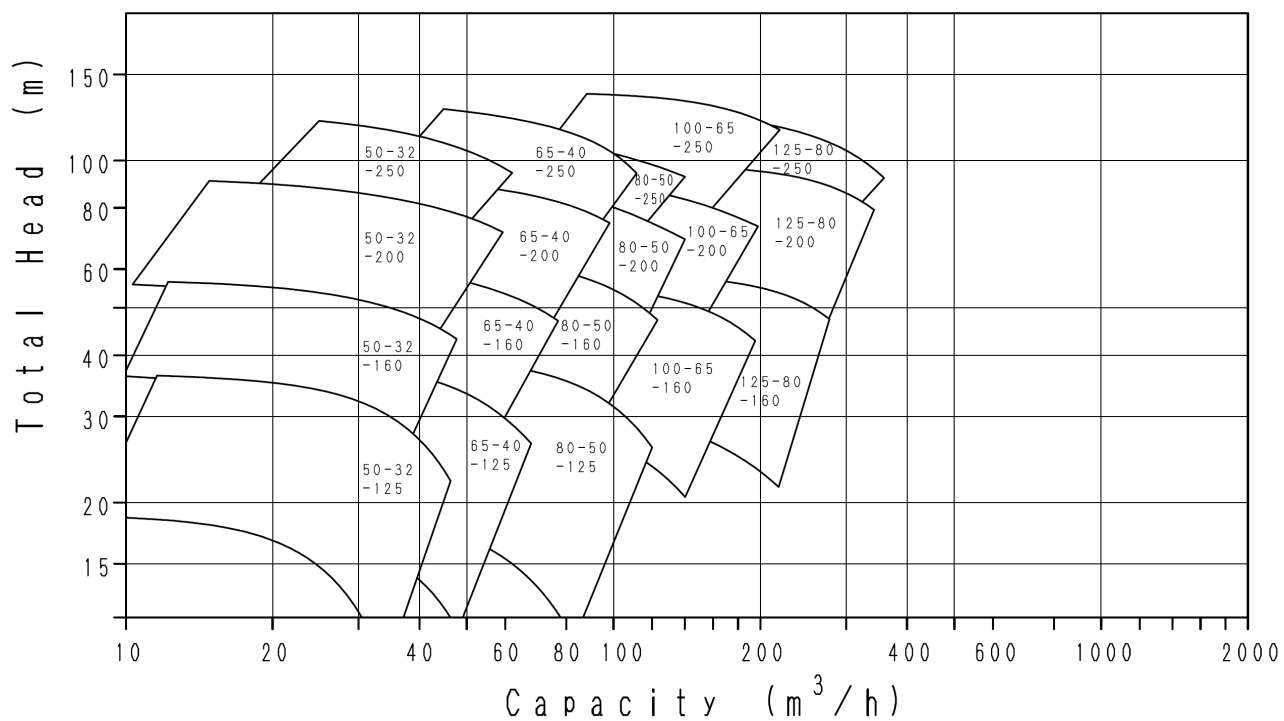
E-2

50Hz – 1450min⁻¹

Note : When selecting a pump , NPSH Av. should have a safety margin of at least 0.5m from NPSH Re.

SELECTION CHART

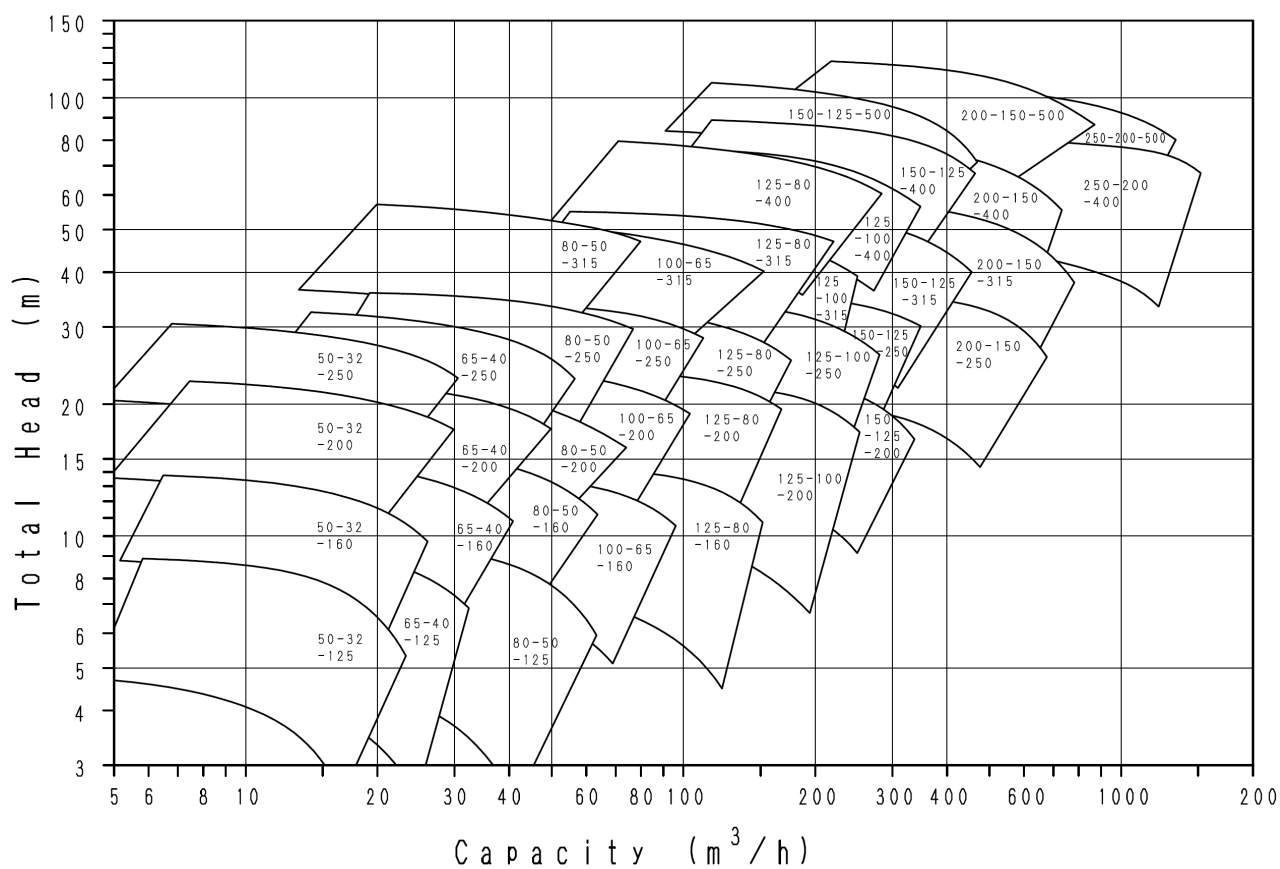
E-3

60Hz – 3550min⁻¹

Note3 : When selecting a pump , NPSH Av. should have a safety margin of at least 0.5m from NPSH Re.

SELECTION CHART

E-4

60Hz – 1750min⁻¹

Note : When selecting a pump , NPSH Av. should have a safety margin of at least 0.5m from NPSH Re.